LED Canopy Light (CPA)

800-553-2112 ● info@oeo.com ● oeo.com



LED CANOPY LIGHT

Versatile, efficient, and built to perform, the CPA Series LED Canopy Light combines modern design with exceptional value. Ideal for gas stations, parking areas, retail spaces, transportation facilities, and other commercial applications, the CPA canopy LED features selectable wattage and adjustable color temperature to meet specific lighting needs. Its sleek, low-profile design and durable housing provide excellent heat dissipation and long-lasting performance. Easy surface, junction box, or 3/4" pendant mounting options make installation simple and flexible.

FEATURES

- **Versatile Performance:** Selectable wattage and color temperature provide flexibility to meet specific lighting requirements.
- **Selectable CCT:** Choose between 4000K and 5000K.
- **Adjustable Light Output:** Three wattage settings (30W, 45W, 63W) delivering 4,050–8,505 lumens.
- **Superior Heat Dissipation:** Durable die-cast aluminum housing promotes efficient cooling and extended LED life.
- **Flexible Installation:** Supports surface, junction box, or pendant mounting using 3/4" NPT pipe (not included).
- **Convenient Wiring:** Four 1/2" NPT side conduit entries.
- **Durable Polycarbonate Lens:** Heat- and UV-resistant prismatic lens promotes uniform light distribution.
- **Long-Lasting Performance:** Rated for 50,000 hours of operation (L80).
- **Optional Sensor:** Photocell or microwave sensors available
- **Optional Emergency Battery Backup:** Provides illumination during power outages.

APPLICATIONS

- Commercial Buildings
- Parking Garage
- Gas Station
- Retail Stores
- Schools
- Hospitality

CERTIFICATIONS

UL · DLC LISTED PREMIUM · CCT Adjustable · Power Adjustable · 5 YEAR Warranty



SPECIFICATIONS

- **POWERED BY:** 120-277V
- **CCT:** Tunable | 4000K, 5000K
- **WATTAGE:** Selectable | 63W, 45W, 30W
- **LUMENS:** Adjustable | 4,050 to 8,505LM
- **EFFICACY (AVERAGE):** 145 LPW
- **OPERATING TEMP:** -40°F to 113°F
- **EFFICACY:** 135 LPW
- **OPTIONS:** Photocell, microvave sensor, emergency backup power
- **WARRANTY:** 5 years




Surface Mounted With J-Box





Conduit Pendant Mount

LED Canopy Light (CPA)

DIMENSIONS

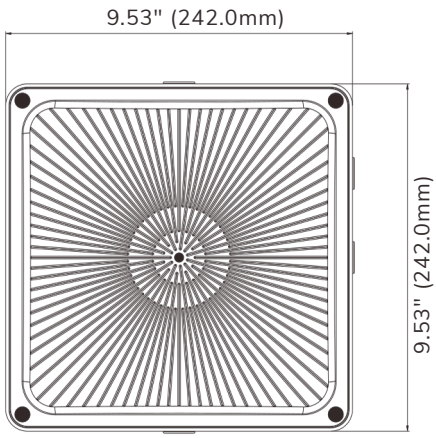


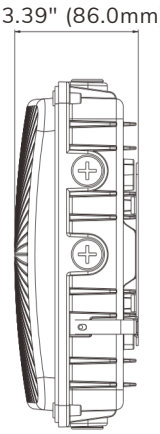

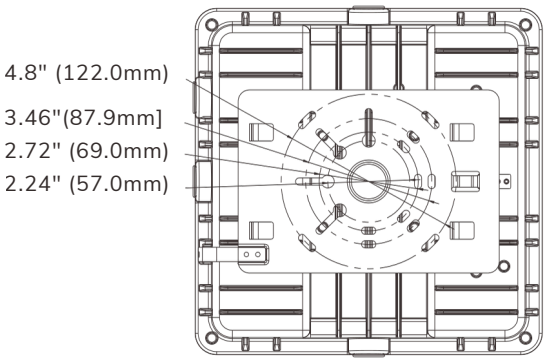

Net Weight: 3.62lbs

PHOTOMETRICS

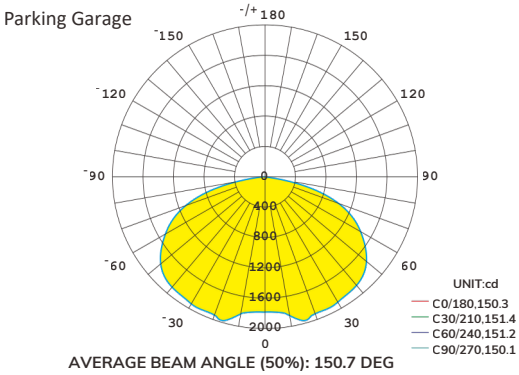

AVERAGE BEAM ANGLE (50%): 150.7 DEG

ACCESSORIES



Photocell | Microwave sensor

ORDERING

MODEL	WATTAGE & LUMENS (@ 5000K)	CCT (TUNABLE)	POWER	SENSOR	PHOTOCELL
OEO-CPA-(63/45/30)W-(40/50)K-UV	63W = 8,505LM 45W = 6,075LM 30W = 4,050LM	4000K, 5000K	120-277V	**Blank:** No Sensor **S:** Microwave Sensor	**Blank:** No Photocell **P:** Photocell





