

## WALL PACK FIXTURE

# Classic Wall Pack

Our 65W and 100W wall pack fixtures feature adjustable color temperature and selectable lumen output settings to meet your exact onsite needs. Providing ultimate flexibility, this product combines high quality and high performance, offering a great value. The high-efficiency light engine and high-quality UV-resistant polycarbonate lens provide excellent lighting to meet your application.

### FEATURES

- Ultimate flexibility with tunable color temperature and selectable wattage and lumen output
- CCT options 3000K, 4000K, 5000K
- Selectable light output from 3,800 lumens to 12,000 lumens
- Sealed die-casting profile for outdoor applications.
- Casting thermally conducts LED heat to optimize performance and long life.
- Suitable for applications requiring 3G
- UV stabilized polycarbonate lens and prismatic design offers great light distribution and uniformity
- Long life, 50,000 hours; L80
- Easy installation and reduced maintenance
- Energy Savings of 70-80%
- Photocell optional for dusk to dawn operation
- DLC 5.1, rebate eligible

### APPLICATIONS


- Exterior building perimeter
- Parking garages and stairwells
- Security lighting
- Doorway and pathway

### CERTIFICATIONS




### SPECIFICATIONS

- **POWERED BY:** 120-277v
- **CCT:** Tunable - 3000K, 4000K, 5000K
- **WATTAGE:** Power Adjustable
- **LUMENS:** Selectable 3,800 LM to 12,000 LM
- **CRI:** 70
- **EFFICACY (AVERAGE):** 120 LPW
- **OPERATING TEMP:** -40°F to 104°F
- **RATING:** L80, 50,000 hours
- **PHOTOCELL:** Optional
- **WARRANTY:** 5 years



# WALL PACK FIXTURE Classic Wall Pack - Selectable CCT & Lumens

## DIMENSIONS

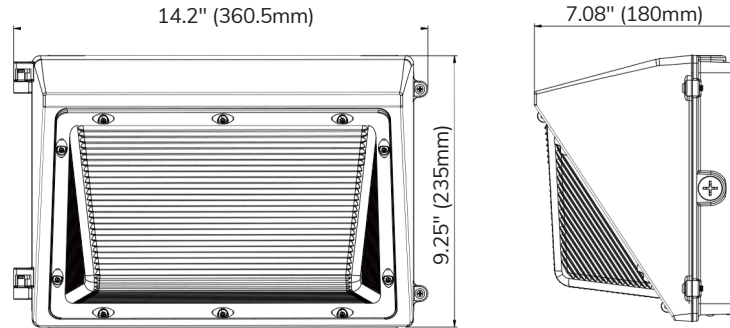

**Net Weight**  
65W: 6.724 lbs.  
100W: 7.319 lbs.

## CCT & POWER ADJUSTABLE

SYSTEM WATTS	VOLTAGE	CRI	LUMENS (3000K)	LPW (3000K)	LUMENS (4000K)	LPW (4000K)	LUMENS (5000K)	LPW (5000K)
<b>65W</b>	120-227V	70	7,700 LM	118	8,300 LM	128	7,900 LM	122
<b>100W</b>	120-227V	70	11,500 LM	115	12,000 LM	120	11,600 LM	116

## ADJUSTABLE LUMEN OUTPUT

SETTING	CCT	CRI	SYSTEM WATTS (65W)	LUMENS (65W)	SYSTEM WATTS (100W)	LUMENS (100W)
100%	3000K	70	67.17	7761.40	99.40	11604.80
	4000K	70	63.67	8334.40	94.13	12123.00
	5000K	70	67.30	7950.20	99.88	11703.10
80%	3000K	70	55.34	6695.36	87.62	10620.13
	4000K	70	52.46	7189.66	82.97	11094.36
	5000K	70	55.45	6857.84	88.04	10708.59
60%	3000K	70	40.97	5275.84	62.02	8200.25
	4000K	70	38.84	5664.98	58.73	8566.43
	5000K	70	41.05	5403.75	62.32	8268.70
40%	3000K	70	27.50	3769.14	38.68	5512.80
	4000K	70	26.06	4047.40	36.63	5758.97
	5000K	70	27.55	3860.62	38.87	5558.50