

WALL PACK FIXTURE - SINGLE CCT

Classic Wall Pack

Our classic style wall packs come in configurations from 30 watts to 125 watts. These fixtures combine a high-efficiency light engine and a high-quality UV-resistant PC lens to provide excellent outdoor lighting. High performance, low cost, great value with optional photocell for dusk to dawn operations. Improve your outdoor lighting and security with this energy saving LED fixture.

FEATURES

- Offered in configurations from 30W to 125W to meet your lighting needs.
- Single CCT options in 4000K and 5000K available in the standard version.
- Scalable lumen packages from 3,400 to 15,000 lumens
- Sealed die-casting profile for outdoor applications.
- Casting thermally conducts LED heat to optimize performance and long life.
- Suitable for applications requiring 3G
- UV stabilized polycarbonate lens and prismatic design offers great light distribution and uniformity
- Long life 50,000 hours; L80
- Easy installation and reduced maintenance
- Energy Savings of 70-80%
- Photocell optional for dusk to dawn operation
- Dark bronze finish (standard)
- DLC 5.1, rebate eligible

APPLICATIONS

- Exterior building perimeter
- Parking garages and stairwells
- Security lighting
- Doorway and pathway

CERTIFICATIONS




SPECIFICATIONS

- **POWERED BY:** 120-277V
- **CCT:** Single CCT - 4000K or 5000K
- **WATTAGE:** 30W to 125W options
- **LUMENS:** Scalable from 3,400 to 15,000LM
- **CRI:** 70
- **EFFICACY (AVERAGE):** 113-120 LPW
- **OPERATING TEMP:** -40°F to 104°F
- **RATING:** L80, 50,000 hours
- **PHOTOCELL:** Optional
- **WARRANTY:** 5 years



WALL PACK FIXTURE
Classic Wall Pack - Single CCT

DIMENSIONS

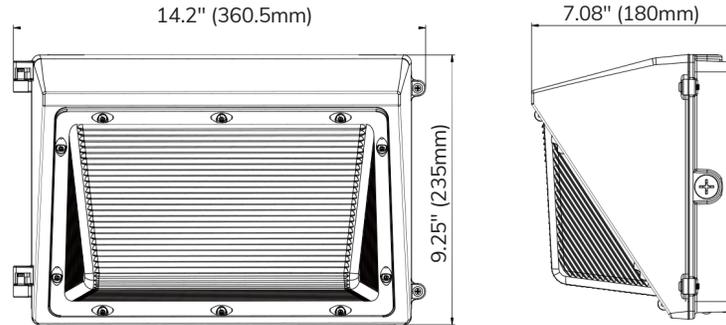

Net Weight
 65W: 6.724 lbs.
 100W: 7.319 lbs.

PERFORMANCE DATA

SYSTEM WATTS	VOLTAGE	CRI	LUMENS (4000K)	LPW (4000K)	LUMENS (5000K)	LPW (5000K)
30W	120-227V	70	3,400 LM	113	3,500 LM	117
40W	120-227V	70	5,000 LM	125	5,100 LM	128
65W	120-277V	70	7,800 LM	120	7,900 LM	122
90W	120-277V	70	10,500 LM	117	10,500 LM	117
125W	120-277V	70	15,000 LM	120	15,000 LM	120

ORDERING GUIDE

FIXTURE TYPE	WATTAGE	VOLTAGE	CCT	FINISH	PHOTOCELL (OPTIONAL)
MWP08 Classic Wall Pack	30W 40W 65W 90W 125W	27V 120-277V	40K 4000K 50K 5000K	D Dark Bronze (Standard) B Black W White	P0 Photocell Blank No Photocell