



WALL PACK FIXTURE

Full Cutoff Wall Pack

This full cutoff wall pack fixture is designed for outdoor building perimeter illumination with safety and security in mind. The downward lighting pattern has zero uplight, making these dark sky friendly. Adjustable color temperature and selectable lumen output settings provide ultimate flexibility to meet your exact onsite needs. This product combines quality, performance, and value offering an aesthetically pleasing wall pack option that is environmentally friendly.



FEATURES

- Ultimate flexibility with tunable color temperature and selectable wattage and lumen output
- CCT options 3000K, 4000K, 5000K
- Scalable lumen packages from 4,100 lumens up to 20,000 lumens
- Rugged cast-aluminum housing with bronze polyester powder paint for outdoor applications
- Casting thermally conducts LED heat to optimize performance and long life
- Dark Sky compliant with zero uplight
- Long life: 50,000 hours; LM-80
- Energy Savings of 70-80%
- Photocell optional for dusk to dawn operation
- Easy installation and reduced maintenance
- Dark bronze finish (standard)
- DLC 5.1, rebate eligible

APPLICATIONS

- Exterior building perimeter
- Schools
- Factories
- Hospitals
- Warehouse
- Retail

CERTIFICATIONS




SPECIFICATIONS

- **POWERED BY:** 120-277V
- **CCT:** Tunable - 3000K, 4000K, 5000K
- **WATTAGE:** Power Adjustable
- **LUMENS:** Scalable 4,100 LM up to 20,000 LM
- **CRI:** 70+
- **EFFICACY:** 140 to 171 LPW
- **OPERATING TEMP:** -40°F to 114°F
- **RATING:** LM-80 | 50,000 hours
- **PHOTOCELL:** Optional
- **WARRANTY:** 5 years

WALL PACK FIXTURE Full Cutoff Pack - Selectable CCT & Lumens

PHOTOMETRICS

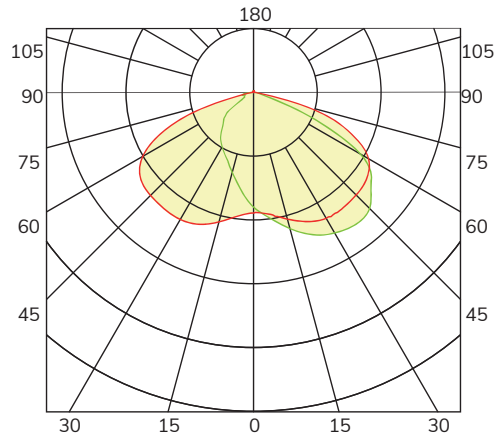

ACCESSORIES



Photocell

Description: Photocell is field installed or pre-installed in factory by requesting



PIR Sensor, 120-277V

USE: Sensor can be pre-installed in factory or field installed



Emergency Battery Backup

Description: It can be pre-installed in factory or field installed 8W 900lm 90min
Only suitable for 70W/135W.





CCT and Wattage controller

Description: Allowing the contractor to set the lumen value and CCT of the fixture at the installation site.



DIMENSIONS

Medium Size:
70W & 125W

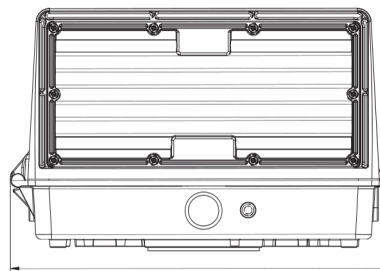

Net Weight
70W: 7.21lb
125W: 7.68lb

Large Size:
135W

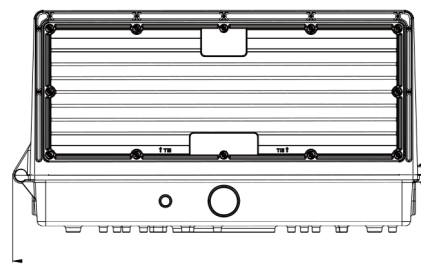


Net Weight
135W: 10.47lb

Full Cutoff Pack - Selectable CCT & Lumens



CCT AND WATTAGE CONTROLLER

This fixture has the function of adjusting the lumens output and color temperature on-site.



Wattage selectable: 100%, 80%, 60%, 40%
CCT selectable: 3000K, 4000K, 5000K

PRODUCT SPECIFICATIONS

70W

SETTING	SYSTEM WATTS	CRI	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
100%	70W	70	9,800 LM	140	11,000 LM	157	10,200 LM	146
80%	56W	70	8,200 LM	146	9,100 LM	163	8,700 LM	155
60%	42W	70	6,400 LM	152	7,000 LM	167	6,800 LM	162
40%	28W	70	4,400 LM	157	4,800 LM	171	4,700 LM	168

125W

SETTING	SYSTEM WATTS	CRI	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
100%	125W	70	17,100 LM	137	19,000 LM	152	18,000 LM	144
80%	100W	70	14,200 LM	142	15,700 LM	157	15,000 LM	150
60%	75W	70	11,000 LM	147	12,100 LM	161	11,700 LM	156
40%	50W	70	7,600 LM	152	8,200 LM	164	8,100 LM	162

135W

SETTING	SYSTEM WATTS	CRI	3000K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
100%	135W	70	19,000 LM	141	20,000 LM	148	19,400 LM	144
80%	108W	70	15,700 LM	145	16,400 LM	152	16,000 LM	148
60%	81W	70	12,000 LM	148	12,600 LM	156	12,300 LM	152
40%	54W	70	8,200 LM	152	8,600 LM	159	8,400 LM	156