



FEATURES

- Wattage and color selectable providing ultimate flexibility to meet lighting specific needs
- Standard lengths - 2FT, 4FT, and 8FT
- Surface mount or suspension mounting options available
- Scalable lumen packages from 1,400 to 10,000 lumens with efficacy up to 150 lumens per watt
- Color selectable: 3500K, 4000K, 5000K
- Easy installation options with standard mounting plate included for surface mount
- Continuous row mounting possible with optional joiner bracket
- Options: aircraft and chain mounting hardware, joiner brackets, emergency battery, wire guard, PIR sensor, Bluetooth sensor
- Long LED life: L70 @ 100,000 hours
- UL listed for damp locations
- DLC 5.1 - rebate eligible

APPLICATION

- Commercial & Industrial
- Warehouse
- Retail
- Hallway & Stairwells
- Corridors

CERTIFICATIONS



LED STRIP LIGHT

The OEO LED Linear Strip Light delivers professional-grade performance in a clean, low-profile design built for flexibility. Available in 2FT, 4FT, and 8FT lengths with selectable color temperature and scalable lumen packages, it's easy to tailor to the exact look and brightness to your application. A precision-engineered optical system minimizes glare for a visually comfortable, fatigue-free environment. Optional PIR motion sensors or Bluetooth smart control add intelligent occupancy detection and dimming. Suitable for surface or suspension, the connectable design adapts to virtually any run length, making it a versatile solution for commercial and light-industrial spaces alike.




SPECIFICATIONS

- **POWERED BY:** 120-277V
- **CCT:** Tunable | 3500K, 4000K, 5000K
- **WATTAGE:** Selectable | Four Options
- **LUMENS:** Adjustable
- **EFFICACY:** Up to 140 lumens per watt
- **CRI:** 80
- **OPERATING TEMP:** -13° to 104°F
- **LENGTH (NOMINAL):** 2FT, 4FT, 8FT options with joiner bracket for expansion
- **MOUNTING:** Surface mount plate (standard); suspended mount (optional)
- **SENSOR OPTIONS:** PIR Occupancy / Daylight Sensor, Microwave Sensor, Bluetooth Smart Control Sensor
- **WARRANTY:** 5 years

STRIP LIGHT LED Linear Strip Light (LF04)

CCT AND WATTAGE SELECTABLE

Field selectable color temperature (CCT) and wattage / lumen output.

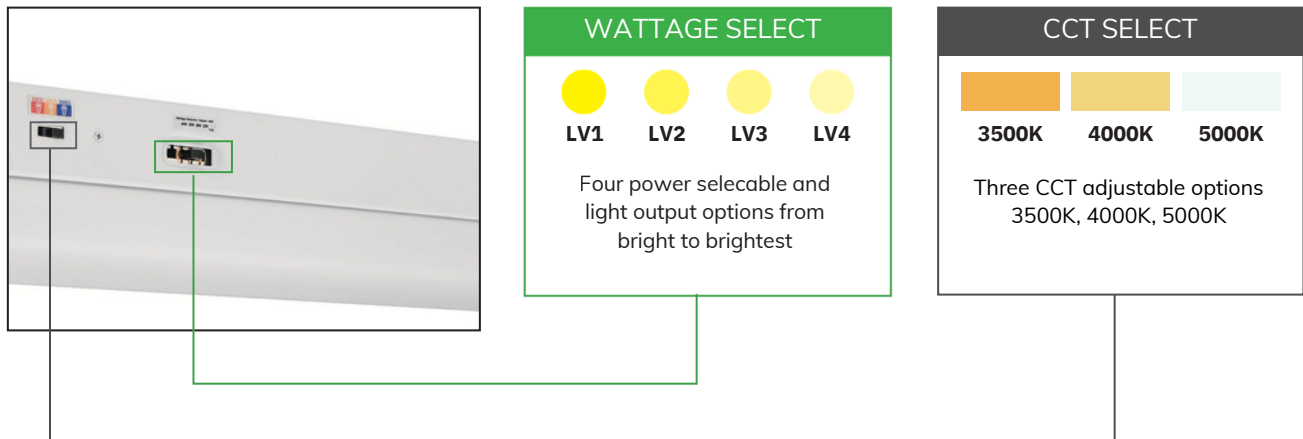

ACCESSORIES (OPTIONAL)

 Surface Mounting Plate (Default)	 Aircraft Cable Suspended (Sold Separately)	 T-Grid Mount Kit (Sold Separately)
 Chain Suspended (Sold Separately)	 Joiner Bracket (Sold separately)	 Emergency Battery 8W 900LM 90 min (Sold Separately)
 PIR Sensor Occupancy, Daylight, Bluetooth Options (Sold separately)	 Microwave Sensor (Sold separately)	 Wire Guard (Sold Separately)

STRIP LIGHT

LED Linear Strip Light (LF04)

EXPANDABLE 8FT STRIP

Foldable 8FT strip in a 4FT box

The 8-foot-long LF04 strip fixture has a collapsable internal hinge design, allowing it to fold in half for shipping. This reduces packaging materials and lowers shipping cost and storage space. Once unpacked, simply expand at the hinge to unfold and lock into place.


FOLDED - 4FT HINGED



UNFOLDED - 8FT STRIP



DIMENSIONS

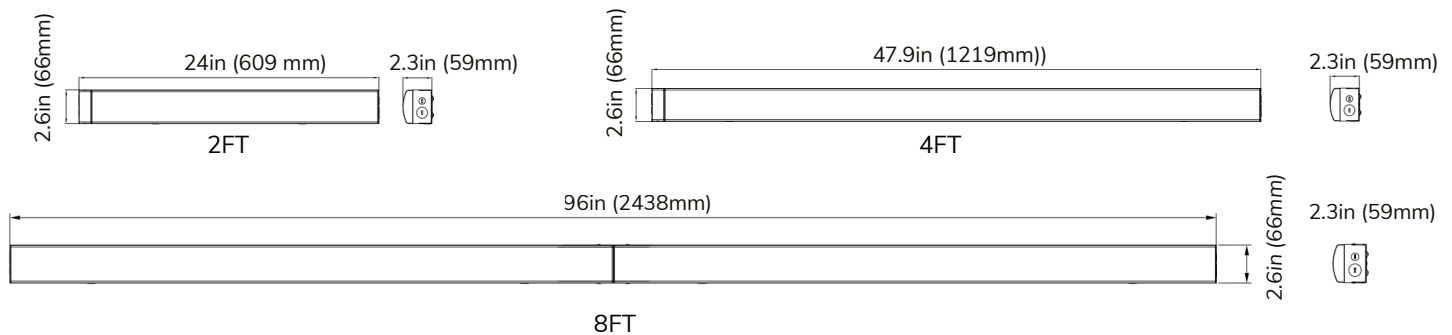

SENSOR OPTIONS

PIR Sensor (with optional Bluetooth controls)

The optional sensor receptacle allows for plug-and-play sensor installation for on-site modifications, making installation quick and hassle-free. Choose a basic PIR sensor technology, or upgrade to a Bluetooth network lighting control sensor.



Microwave Sensor

The optional microwave sensor with advanced sensing technology enables automatic detection of motion, allowing for intelligent and energy-efficient lighting control.



STRIP LIGHT

LED Linear Strip Light (LF04)

PERFORMANCE DATA

LF04-2FT-24W

SETTING	2FT STRIP WATTAGE	3500K		4000K		5000K	
		LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
LV1	24W	3,300	138	2,500	146	3,400	142
LV2	20W	2,800	140	3,000	150	2,900	145
LV3	16W	2,300	144	2,500	156	2,400	150
LV4	10W	1,400	140	1,600	160	1,500	150

LF04-4FT-40W

SETTING	4FT STRIP WATTAGE	3500K		4000K		5000K	
		LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
LV1	40W	5,400	135	5,700	143	5,600	140
LV2	34W	4,700	138	5,000	147	4,800	141
LV3	28W	4,000	143	4,200	150	4,100	146
LV4	22W	3,200	145	3,400	155	3,300	150

LF04-8FT-70W

SETTING	8FT STRIP WATTAGE	3500K		4000K		5000K	
		LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
LV1	70W	9,500	136	10,000	143	9,800	140
LV2	62W	8,600	139	9,100	147	8,900	144
LV3	54W	7,700	143	8,100	150	7,900	146
LV4	46W	6,700	146	7,100	154	6,900	150

ORDERING OPTIONS

FIXTURE TYPE	LENGTH & WATTAGE	VOLTAGE	CCT (TUNABLE)	SENSOR (OPTION)	MOUNTING	EM BACKUP
OEO-LF04	2FT-24W 4FT-40W 8FT-70W	27V 120-277V	DDK 3500K, 4000K, 5000K	Blank Without Sensor OS Occupancy PIR Sensor BT Bluetooth Sensor	SM Surface Mount CI Chain Installation SI Steel / Aircraft Cable TG T-Grid Mount	Blank No Backup B Emergency Battery