



FEATURES

- Selectable wattage & lumen packages
- Field selectable color temperature (CCT) from warm white (3500K), neutral white (4000K), or cool white (5000K)
- Center basket design with polymer diffusing lens for soft & uniform lighting
- Durable steel body with efficient heat dissipation
- Sensor ready for simple, field installable optional sensor such as occupancy / motion, daylight harvesting, and Bluetooth controls
- Easy installation - mount into standard t-grid suspended ceiling systems
- Energy savings of up to 81% compared to fluorescent fixtures
- Perfect blend of design, performance, and reliability
- Long LED lifetime; rated for over 50,000 hours

APPLICATION

- Schools & Universities
- Office
- Hospital & Medical
- Hospitality
- Grocery & Retail
- Industrial

CERTIFICATIONS



LED TROFFER: T-FLEX SERIES

The T-Flex LED recessed troffer fixtures delivers a superior replacement option for traditional fluorescent lay in fixtures. Using today's innovative and energy savings technology, these color temp and wattage selectable troffers provide ultimate flexibility and come in standard sizes of 2'x2' and 2'x4' configurations to suit any commercial application and layout. Easy field installable optional sensors available for occupancy / motion detection, daylight harvesting, and Bluetooth controls. Our simple network lighting controls is easy to install and simple to use - no need for expensive control systems. Common applications include office, retail, schools & universities, hospitals, and more.




SPECIFICATIONS

- **POWER:** 120-277V (with 0-10V dimming)
- **CCT:** Tunable | 3500K, 4000K, 5000K
- **WATTAGE:** Selectable
- **LUMENS:** Adjustable | 5,700 LM maximum
- **PROFILE:** 2'x2' and 2'x4' standard sizes
- **EFFICACY:** 125 lumens per watt
- **DIMMABLE:** 0-10V
- **CRI:** 80+
- **OPERATING TEMP:** -4°F to 104°F
- **OPTIONS:** Occupancy / daylight sensor; Bluetooth network controls; surface mount kit
- **ENERGY SAVINGS:** Up to 81%
- **WARRANTY:** 5 years

LED TROFFER: T-FLEX SERIES

Power & CCT Selectable Troffer Light

DIMENSIONS

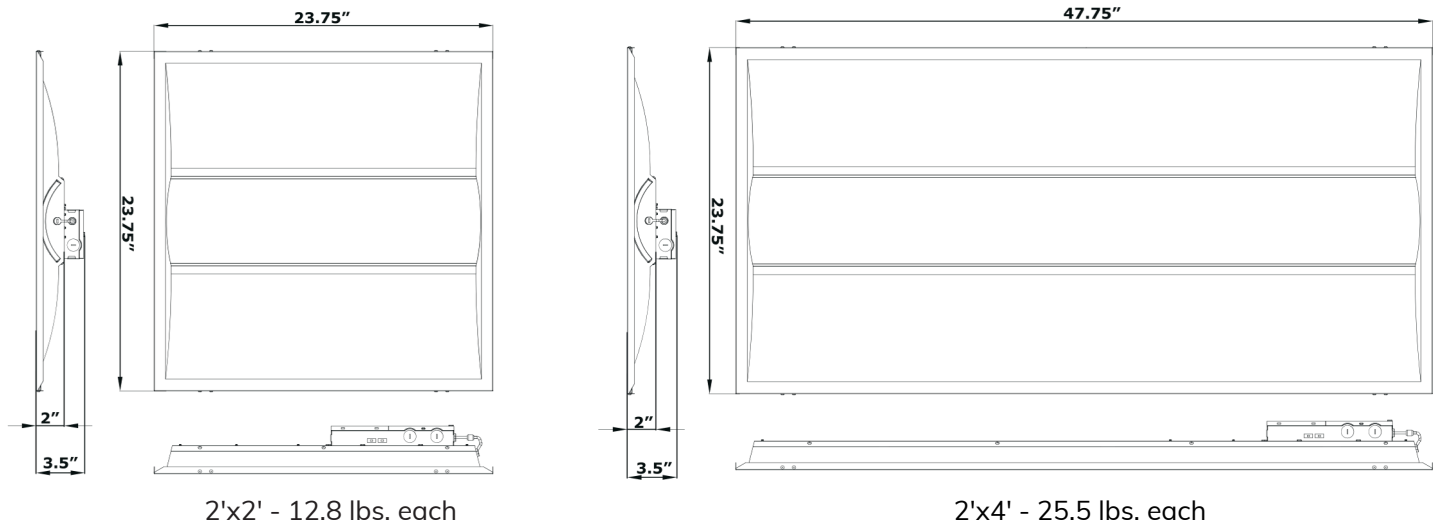

ORDERING GUIDE

MODEL	PART #	SIZE (NOMINAL)	LUMENS (MAXIMUM)	WATTAGE (SELECTABLE)	LPW	CCT	POWER	CRI
STA2MP38E83550-DS(M)	60100	2' x 2'	3,800 LM	21W, 25W, 30W	125 LPW	3500K, 4000K, 5000K Selectable	120-347V	> 80
STA4NP57E83550-DS(M)	60106	2' x 4'	5,700 LM	36W, 40W, 45W	125 LPW	3500K, 4000K, 5000K Selectable	120-347V	> 80

* Standard case packaging: 2x2 includes 4 per case; 2x4 includes 2 per case