



FEATURES

- Closed housing, sealed against moisture and environmental contaminants
- Stainless steel clamp design, convenient assembly and separation of lamp body
- 4 foot and 8 foot lengths available
- Color selectable: 3500K, 4000K, 5000K
- Scalable lumen packages from 3,500 to 12,800 LM with efficacy up to 152 lumens per watt
- Adjustable lumen output with three lumen settings
- 0-10V dimming standard for a dimming range of 100% to 10%.
- IP65 rating - protection from water and debris
- Operating temperature: -22°F to 122°F
- Long LED Life: LM-80 @ 100,000 hours
- Optional motion sensor
- Optional emergency battery

APPLICATION

- Industrial
- Manufacturing
- Indoor & Outdoor
- Parking Garages
- Walk In Coolers
- Damp Locations

CERTIFICATIONS



LED VAPOR TIGHT FIXTURE

LED Vapor Tight

This LED vapor tight fixture is designed to withstand harsh environments with protection against moisture, dust, and other contaminants. Available in 4 foot and 8 foot lengths, the fixture housing is made of polycarbonate material with excellent stability and durability. Stainless steel clips allow for easy disassembly and installation. For use in a variety of indoor and outdoor applications where exposure to elements is of concern.



SPECIFICATIONS

- **POWERED BY:** 120-277V
- **CCT:** Field Selectable - 3500K, 4000K, 5000K
- **WATTAGE:** Adjustable
4FT - 25W, 35W, 50W
8FT - 60W, 75W, 90W
- **LUMENS:** Selectable
4FT - 3,500 to 7,100 LM
8FT - 8,300 to 12,800 LM
- **OPERATING TEMP:** -22°F to 122°F
- **EFFICACY:** Upto 152 lumens per watt
- **RATINGS:** IP65, UL wet listed
- **LM RATING:** LM-80 @ 100,000 hours
- **WARRANTY:** 5 years

NOTE:

Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 77°F (±5°F) specifications subject to change without notice.

LED VAPOR TIGHT LED Vapor Tight Fixture

PRODUCT SPECIFICATIONS

OEO-VT04-50W-4FT

SETTING	4FT - SYSTEM WATTS	3500K		4000K		5000K	
		LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
1	50W	6,700 LM	134 LM/W	7,100 LM	150 LM/W	6,900 LM	140 LM/W
2	35W	4,780 LM	137 LM/W	5,100 LM	150 LM/W	4,900 LM	140 LM/W
3	25W	3,500 LM	140 LM/W	3,800 LM	150 LM/W	3,560,LM	140 LM/W

OEO-VT04-90W-8FT

SETTING	8FT - SYSTEM WATTS	3500K		4000K		5000K	
		LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
1	90W	12,200 LM	136 LM/W	12,800 LM	142 LM/W	12,500 LM	139 LM/W
2	75W	10,300 LM	137 LM/W	10,800 LM	144 LM/W	10,500 LM	140 LM/W
3	60W	8,300 LM	138 LM/W	8,800 LM	147 LM/W	8,500 LM	142 LM/W

PRODUCT ACCESSORIES



Mounting Bracket (Standard)



Emergency Battery
8W, 900LM, 90MIN
(Sold separately)



Microwave Sensor
NO.: HD027VCR
Description: 12VDC input
(Sold separately)



Chain
Description: 12in long
(Standard)




Hardware bag (Standard)



Aircraft Cable
Description: 10FT long
(Sold separately)

LED VAPOR TIGHT LED Vapor Tight Fixture

DIMENSIONS

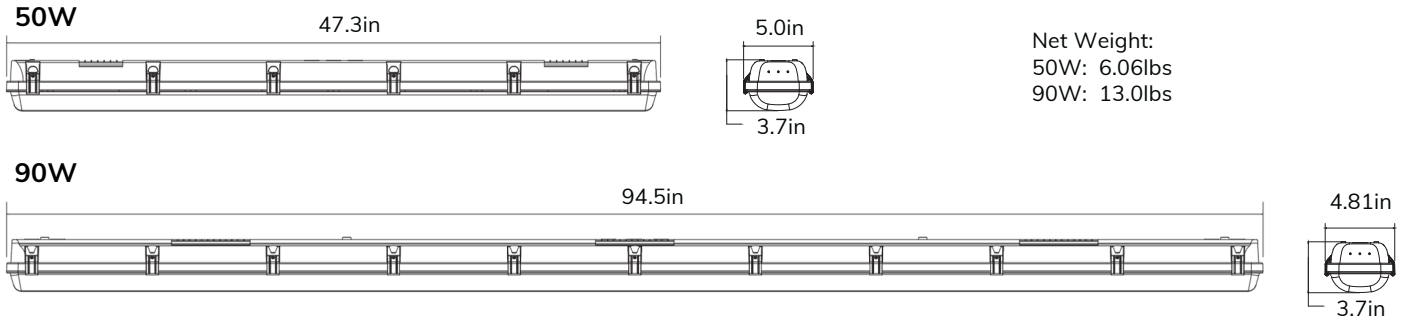


ORDERING

FIXTURE TYPE	WATTAGE	VOLTAGE	FINISH	CCT	SENSOR (OPTION)	BACKUP BATTERY	LENS
OEO-VT04 Vapor Tight	50W 90W	27V 120-277V	W White	DDK Adjustable color temperature	M With Sensor Blank Without Sensor	B Emergency Battery Blank Without Emergency Battery	F Frosted Diffuser

CCT AND WATTAGE SELECTABLE

This fixture has the function of adjusting the lumens output and color temperature on-site.

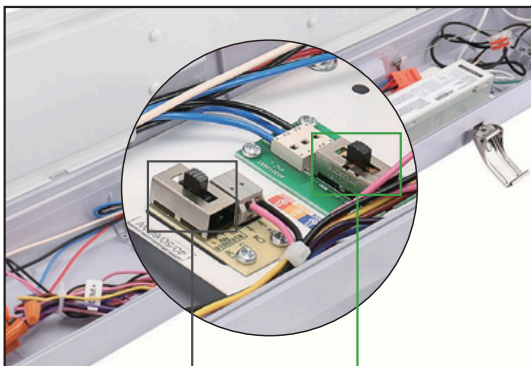

WATTAGE SELECTABLE



LV1



LV2



LV3

Each model supports 3 positions
wattage regulation:
LV1, LV2, LV3

CCT SELECTABLE



3500K



4000K



5000K

Offer three CCT adjustable
(3500K, 4000K, 5000K).