



TRADITIONAL WALL PACK

Built for straightforward retrofit & new-construction applications, this traditional-style LED wall pack combines flexibility with reliable performance in a single fixture. Field-selectable CCT and power output allows you to configure on-site to match project specs, eliminating guesswork and reducing inventory complexity. An included photocell enables automatic dusk-to-dawn operation and can be disabled for applications requiring manual control. With high lumen output, this fixture is a dependable, cost-effective solution to improve lighting without sacrificing light quality or coverage.

FEATURES

- Ultimate flexibility with tunable color temperature and selectable wattage and lumen output
- CCT options 3000K, 4000K, 5000K
- Selectable light output from 5,200 lumens to 15,600 lumens
- Die-cast aluminum housing, borosilicate glass lens
- IP65 rated for outdoor / wet locations
- Long life, 50,000 hours; 5 year warranty
- Easy installation and reduced maintenance
- Energy Savings of 70-80%
- Photocell optional for dusk to dawn operation
- Dark bronze finish (standard), white (optional)
- TAA Compliant
- DLC Premium, rebate eligible

APPLICATIONS


- Building perimeter
- Loading dock & entry doors
- Parking garages and stairwells
- Safety & security lighting
- Schools, campuses, storage facilities

CERTIFICATIONS




SPECIFICATIONS

- **POWER:** 120-277V
- **CCT:** Tunable | 3000K, 4000K, 5000K
- **WATTAGE:** Power Adjustable
- **LUMENS:** Adjustable | 15,600 LM maximum
- **EFFICACY:** 130 lumens per watt
- **DIMMABLE:** 0-10V
- **CRI:** 80+
- **OPERATING TEMP:** -40°F to 122°F
- **RATING:** L80, 50,000 hours
- **PHOTOCELL:** Optional
- **WARRANTY:** 5 years

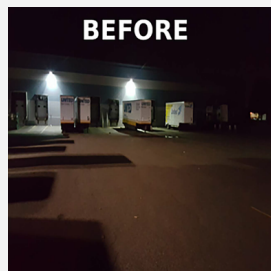

Traditional Wall Pack - Selectable CCT & Power

DIMENSIONS

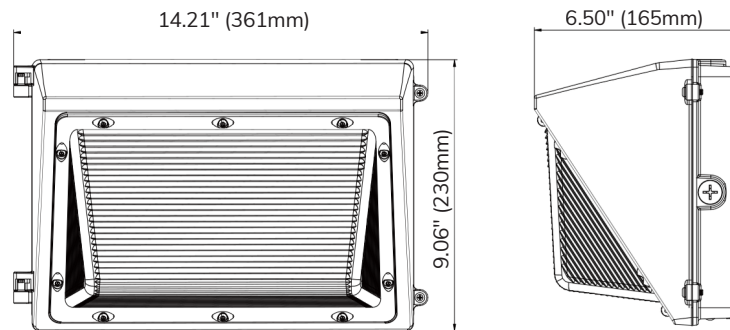

ORDERING GUIDE

MODEL	WATTAGE (SELECTABLE)	EFFICACY	CCT (TUNABLE)	POWER	CRI	PHOTOCELL
TWPM-80S	80W, 60W, 40W	130 LPW	3000K, 4000K, 5000K	120-277V	> 80	YES
TWPM-100S	100W, 80W, 60W					
TWMP-120S	120W, 100W, 80W					