

HIGH BAY FIXTURE

LHBB – Linear High Bay

The LHBB linear high bay fixture is an efficient LED option for commercial and industrial lighting applications. For use indoors in non-corrosive environments, this is an economical option for both low bay and high bay areas such as warehouses, factories, gymnasiums, workshops, utility areas, and more. Upgrade your existing T5 fluorescent or metal halide fixtures to LED and save!

FEATURES

- Linear High Bay: High bay and low bay LED fixture
- Energy Savings of 50-60%
- Indoor use, non-corrosive environments – warehouse, manufacturing, gymnasiums, workshops, garages, etc.
- Aluminum alloy heatsink for improved heat dissipation
- Adjustable 6 foot steel cable supplied for easy mounting
- ¾" knockout for pendant mounting
- Long LED Life: L85 > 60,000 hours
- Available in both 4000K and 5000K color temperatures
- DLC 5.1, rebate eligible


APPLICATIONS

- Commercial & Industrial
- Warehouse
- Manufacturing
- Distribution Center
- Gymnasium
- Workshops
- Garages

CERTIFICATIONS



RoHS

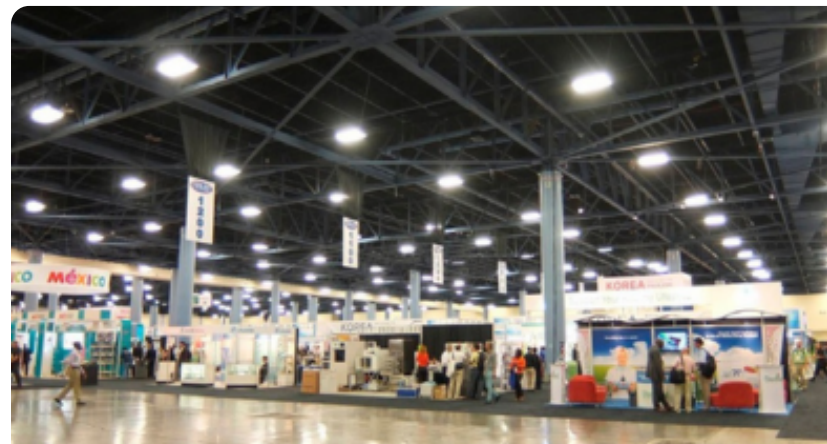


SPECIFICATIONS

- **ENERGY SAVINGS:** 50-60%
- **POWERED BY:** 120-277v or 347-480v
- **CCT:** 4000K, 5000K
- **WATTAGE:** 150W, 200W
- **LUMENS:** 22,500 to 30,000 LM
- **CRI:** > 80
- **OPERATING TEMP:** -40°F to 122°F
- **BEAM ANGLE:** 120° distribution
- **EFFICACY:** 150+ lumens per watt
- **MOUNTING:** Adjustable 6 foot cable supplied
- **DIMMING:** 0-10v, dimming to 10%
- **WARRANTY:** 5 years / 50,000 hours
- **MANUFACTURER INFO:** Universal Douglas

LINEAR HIGH BAY FIXTURE
OEO LHBB – Linear High Bay Fixture

DIMENSIONS

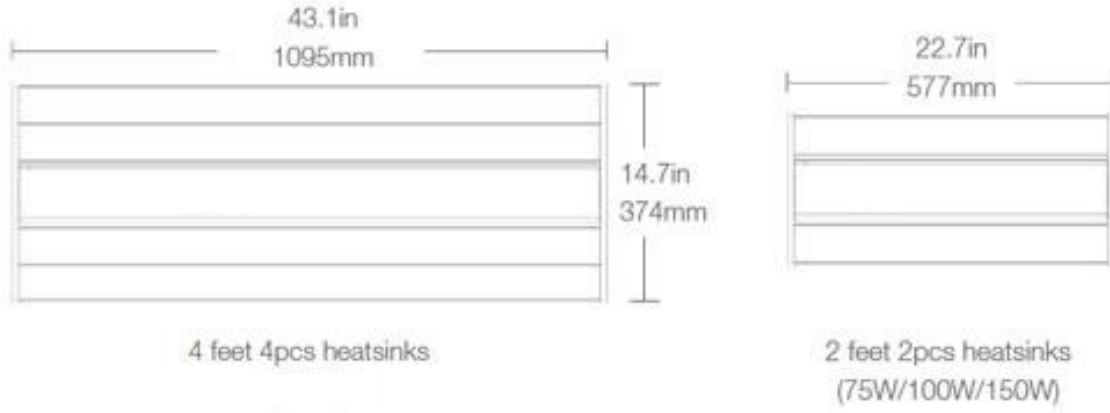

PRODUCT SPECIFICATIONS

MODEL	LENGTH	WATTAGE	CCT	LUMENS	LPW	BEAM ANGLE	VOLTAGE
OEO-LHBB-150W-850-U-120-VA-2-2	2ft	150W	5000K	22,500 LM	150	120	120-277V
OEO-LHBB-200W-840-U-120-VA-4-2	4ft	200W	4000K	30,000 LM	150	120	120-277V
OEO-LHBB-200W-850-H-120-SM-4-3	4ft	200W	5000K	30,000 LM	150	120	347-480V