



LOW BAY LED LAMP - HYBRID

OEO EZ LED Super Hybrid Mini

Easy replacement of 100W to 250W HID lamps in hard-to-reach areas like recessed cans in soffit and canopies. Equal brightness up to 250W metal halides, 450W incandescents or 300W halogens. Versatile product is simultaneously ballast compatible (Type A) and line voltage 120-277v compatible (Type B).

FEATURES

- Ballast compatible or ballast bypass
- Superior optical distribution provides optimal light level and increased energy savings
- Reduce energy consumption by 50-75%
- Robust design for harsh conditions
- Passive heat sink for dusty, dirty environments
- Long life LED: 50,000 hrs; 5 year warranty
- Low glare optic design
- DLC 5.1, rebate eligible (45W, E39 base only)
- Occupancy and daylight harvesting option
- Bluetooth control option

APPLICATION

- Manufacturing
- Hotels
- Convention Centers
- Welding Shops
- Churches
- Atriums

CERTIFICATIONS



RoHS



SPECIFICATIONS

- **POWERED BY:** 110V to 277V or HID Ballast
- **ENERGY SAVINGS:** 50-75%
- **MOUNTING:** Vertical
- **BEAM ANGLE:** 90° Distribution
- **OPERATING TEMP:** -40°F to 122°F enclosed, -40°F to 149°F open
- **START UP:** Instant On/Off, Instant Re-strike
- **COMPATIBLE:** Dry and Damp Locations
- **WARRANTY:** 5 years/50,000 hours
- **TYPE:** Hybrid-Ballast Compatible or Ballast Bypass

LOW BAY LED LAMP - HYBRID
OEO EZ LED - Super Hybrid Mini

PRODUCT SPECIFICATIONS


MODEL	REPLACES	WATTAGE	LUMENS	CCT	LPW	BASE	FIXTURE TYPE
OEO Super Hybrid Mini-28W	100-175W HID	28W	4000 LM	4,000K	142	E26	Open & Closed
OEO Super Hybrid Mini-45W	175-250W HID	45W	7,000 LM	4000K/ 5,000K	155	E26	Open
OEO Super Hybrid Mini-45W	175-250W HID	45W	7,000 LM	5,000K	155	E39	Open




BEFORE

AFTER


SOCKET EXTENDERS / ADAPTORS

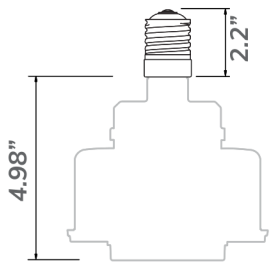

E39 to E26 Short

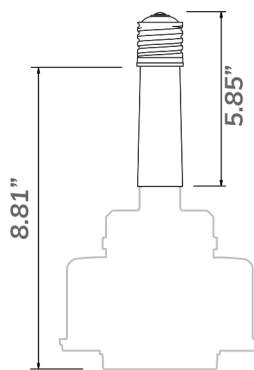


E39 to E26 Long

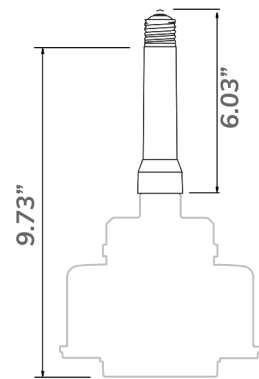


E26 to E26 Long

LOW BAY HYBRID BULB OEO EZ LED Super Hybrid Mini


DIMENSIONS

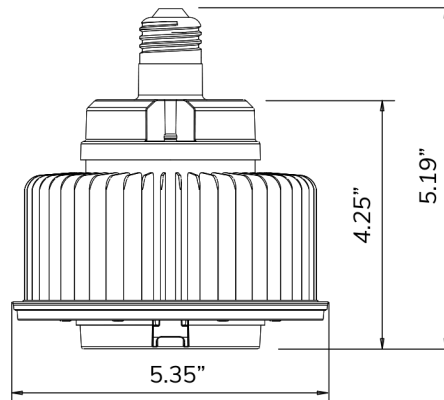


APPLICATIONS

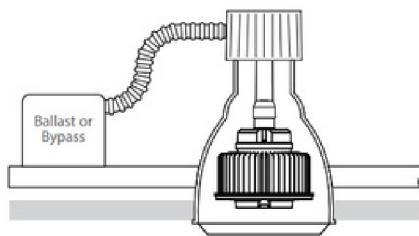


Enclosed Recessed Cans >7"



Garage Canopy

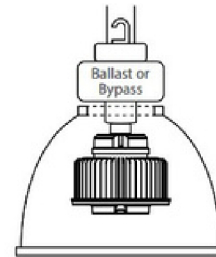

Low Bay



Open

ORDERING

MODEL	WATTAGE	BASE	COLOR TEMP	EXTRA OPTIONS
OEO Super Hybrid Mini	28W	E26	40-4000K	OS - Occupancy Sensor
	45W	E39	50-5000K	BT - Bluetooth Controls

ADDITIONAL OPTIONS

- Bluetooth network controls
- Occupancy / motion sensor
- Dimming, scheduling, grouping, zone controls
- Uplight accessory
- Black pendant mount with architectural cylinder

SAFETY NOTES

- Turn off power when installing lamp
- Do NOT install in line voltage above 277V
- Not intended for use in emergency lighting