

DIRECT REPLACEMENT LED LAMP

OEO EZ LED Ultra Series

The OEO EZ LED Ultra Series is designed to directly replace 175W to 400W metal halide lamps. This industrial LED is compatible with traditional HID fixtures and emits more light output without rewiring the ballast. Simply remove the metal halide and replace it with the OEO EZ LED for longer life, while using a fraction of the power.

FEATURES

- Simply screw in EZ LED to existing high bay fixtures; no rewiring required
- Passive heat sink designed for dusty, dirty conditions
- 60-70% energy savings
- Rated for over 60,000 hours
- Color temperature 4000K or 5000K; 70+ CRI
- Prevent dark ceilings with optional uplighting
- Fast ROI payback
- Reduced HVAC costs since LED is 90% cooler than metal halides
- No mercury or hazardous materials
- Optional version with uplight

APPLICATIONS

- Industrial & manufacturing facilities
- Warehouses
- Machine & welding shops
- Paper converters
- Gymnasiums
- Big Box Retailers
- Automotive Shops

CERTIFICATIONS



SPECIFICATIONS

- **EFFICACY:** 125 lumens per watt
- **POWERED BY:** Metal halide ballast ONLY
- **ENERGY SAVINGS:** 60-70%
- **MOUNTING:** For use with vertical mogul base
- **FIXTURES:** 1) Standard (HO-D-P): Open fixture preferred; 2) Optional Uplight (HO-U-P): Open fixture ONLY
- **OPERATING TEMP:** -4°F to 131°F for open, -4°F to 113°F for enclosed
- **SENSORS:** Yes, compatible with occupancy sensors
- **DIMMABLE:** No
- **WARRANTY:** 5 years / 50,000 hours


NOTE:

For use with functional magnetic ballasts (DO NOT use on direct line voltage.

HIGH BAY LED LAMP - DIRECT REPLACEMENT OEO EZ LED - Ultra Series


BRIGHT

OEO-EZ-LED-HO-D-P-5K

Installed Ballast		400W	350W	320W	250W	175W
	Wattage	143W	126W	115W	91W	63W
	Lumens	19,500	16,780	15,400	12,100	8,500

BRIGHTEST WITH UPLIGHT (OPEN FIXTURES ONLY)

OEO-EZ-LED-HO-U-P-4K or 5K


Installed Ballast		400W	350W	320W	250W	175W
	Wattage	170W	148W	135W	105W	77W
	Lumens	24,000	21,000	19,000	15,000	10,500

**Lumen Output and Power Consumption +/- 5%, based on actual magnetic ballasts.




BEFORE

AFTER

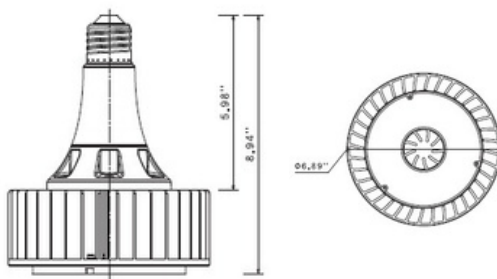

MODEL: EZ-LED-HO-D-P-5K
WEIGHT: 2.3 LBS

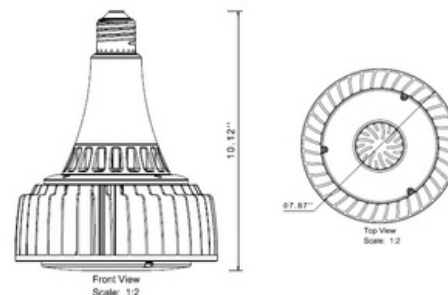

MODEL: EZ-LED-HO-U-P-4K
WEIGHT: 3.13 LBS

NOTES

The following instructions must be complied with to avoid risk of personal injury, property damage and poor lamp performance. FOR USE WITH FUNCTIONAL MAGNETIC BALLASTS. USE ONLY IN PROPERLY RATED BALLASTS. IT IS RECOMMENDED TO REMOVE LENS COVER IF POSSIBLE. DO NOT USE IN SODIUM VAPOR BALLASTS. DO NOT USE IN MERCURY VAPOR BALLASTS. DO NOT USE IN ELECTRONIC BALLASTS. DO NOT USE IN DAMP ENVIRONMENTS. DO NOT USE IN FIXTURES WHERE THE EXISTING FIXTURE BALLAST HAS BEEN BYPASSED. FAILURE TO ADHERE TO INSTRUCTIONS VOIDS WARRANTY.