



## LED OFFICE FIXTURE

# OEO LED Troffer

LED recessed troffer fixtures deliver a superior replacement option for traditional fluorescent lay in fixtures with today's innovative and energy savings technology. These color and wattage selectable fixtures provide ultimate flexibility and come in standard sizes of 2'x2' and 2'x4' to suit any commercial application and layout. This troffer fixture provides suitable light without any of the maintenance issues associated with fluorescent tubes. Common applications include office, retail, schools & universities, hospitals, and more.

### FEATURES

- Energy savings of 50-60%
- Field selectable color temperature & wattage controls
- Easy installation mounting into standard t-grid suspended ceiling systems
- Center basket design with soft & uniform light beam pattern
- Constructed with a durable steel housing body
- LED rating L90 - 90% lumen maintenance at 54,000 hours
- LED lifetime rating of at least 50,000 hours, this fixture is designed for years of reliable operation.
- Ribbed polymer diffusing lens for even illumination
- Perfect blend of design, performance, and reliability

### APPLICATION

- Office Lighting
- Schools & Universities
- Retail
- Hospitals



### SPECIFICATIONS


- **COLOR SELECTABLE:** Field selectable CCT – 3500K, 4000K & 5000K @ >80 CRI
- **WATTAGE SELECTABLE:** Field selectable wattage and lumen output
- **PROFILE:** 2'x2' and 2'x4' standard sizes
- **POWER:** 120v-277v with 0-10v dimming
- **EFFICACY:** 125+ lumens per watt
- **MOTION SENSOR:** Optional sensors available
- **WARRANTY:** 54,000 hours / 10 year Manufacturer's Warranty
- **MANUFACTURER INFO:** Energetic 60068 / E5T4A2534D-A3550

### CERTIFICATIONS

**RoHS**

# LED OFFICE FIXTURE OEO LED Troffer

## DIMENSIONS

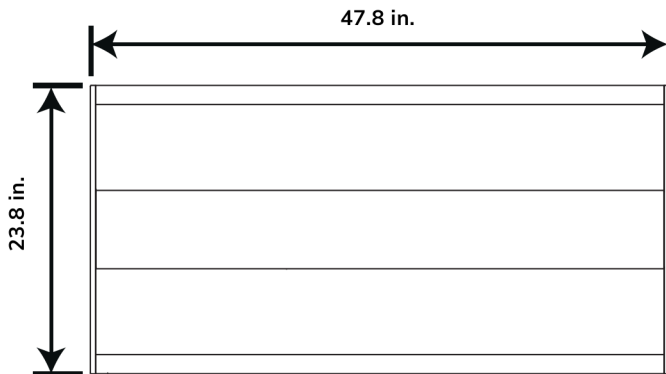

## LUMEN OUTPUT

Profile	Wattage Setting	Color Temperature Setting		
		3500K	4000K	5000K
2x4 (25W, 30W, 34W)	25W	3350	3375	3400
	30W	3930	3960	3990
	34W	4318	4352	4386

## PRODUCT SPECIFICATIONS

Model	Item Number	Wattage	Lumens	LPW	Color Temperature	Voltage
E5T4A2534D-83550	60068	25w, 30w, 34w selectable	4,386 max	127	3500K, 4000K, 5000K selectable	120-277v

