



ROUND HIGH BAY FIXTURE

LED Pro-Classic High Bay

The Pro-Classic High Bay is well suited for many retrofit renovations and new construction applications including warehouse, industrial, manufacturing, retail, and gymnasiums. It delivers uniform illumination output with 1-for-1 replacement of 175-600w HID while delivering maximum energy savings.

FEATURES

- Offset driver improves thermal management
- Reduce energy consumption by 50-75%
- Robust design for harsh conditions
- Passive heat sink for dusty, dirty environments
- Uniform illumination
- Long life LED
 - L89 @ 54,000 hrs
 - L70 @ 155,000 hrs
- Lightweight design for easy installation
- DLC Premium, Rebate eligible


APPLICATIONS

- Industrial
- Warehouse
- Manufacturing
- Machine & welding shops
- Paper & packaging converters
- Gymnasiums
- Workshops

CERTIFICATIONS



RoHS

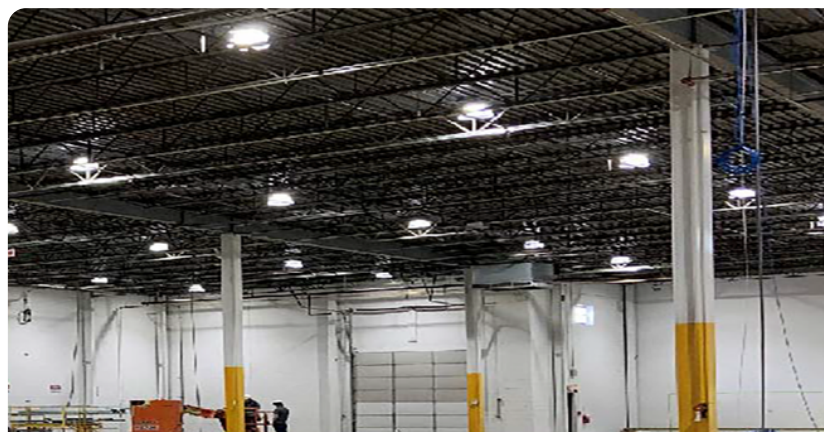

SPECIFICATIONS

- **POWERED BY:** 120-277v
- **BEAM ANGLE:** 100° Distribution
- **OPERATING TEMP:** -13°F to 113°F
- **CCT:** 5000K
- **CRI:** 82
- **ENVIRONMENT:** Dry and damp locations
- **MOUNTING:** Single eyehook with safety cable
- **OPTIONS:** Acrylic dome
- **WARRANTY:** 5 years

ROUND HIGH BAY FIXTURE LED Pro-Classic High Bay



BEFORE



AFTER

PRODUCT SPECIFICATIONS



MODEL	REPLACES	WATTAGE	LUMENS	LUMENS PER WATT
OEO-2HBA-100-850	250-400W HID	100W	13,800 LM	137
OEO-2HBA-150-850	400W HID	150W	21,120 LM	138
OEO-2HBA-200-850	400-600W HID	200W	27,170 LM	135
OEO-2HBA-240-850	600-1000W HID	240W	34,764 LM	141

DIMENSIONS

OEO-2HBA-100-850
OEO-2HBA-150-850

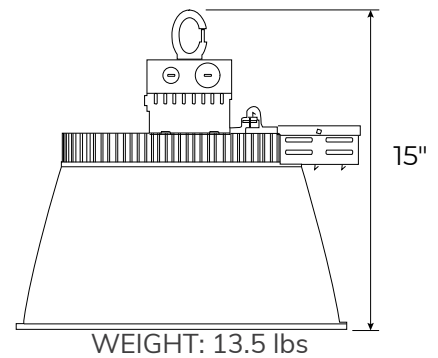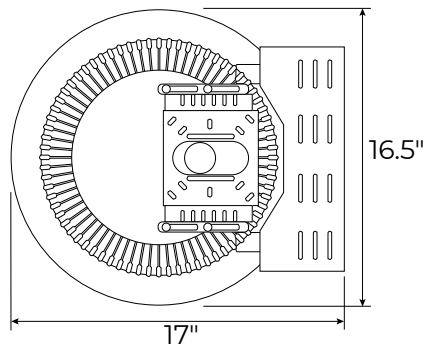

OEO-2HBA-200-850
OEO-2HBA-240-850

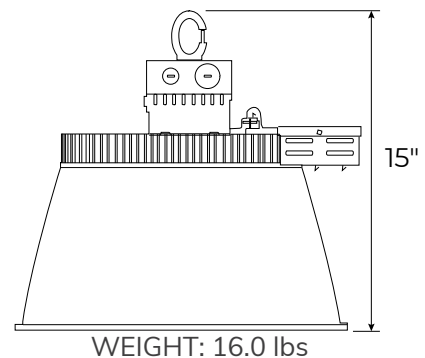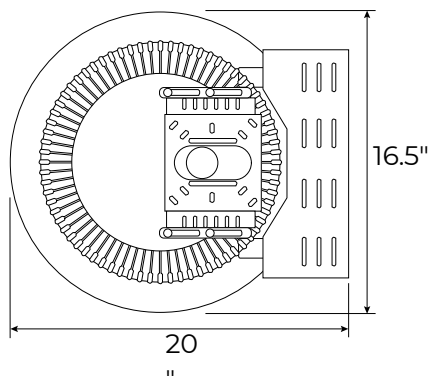

ROUND HIGH BAY FIXTURE
LED Pro-Classic High Bay

PHOTO GALLERY

