


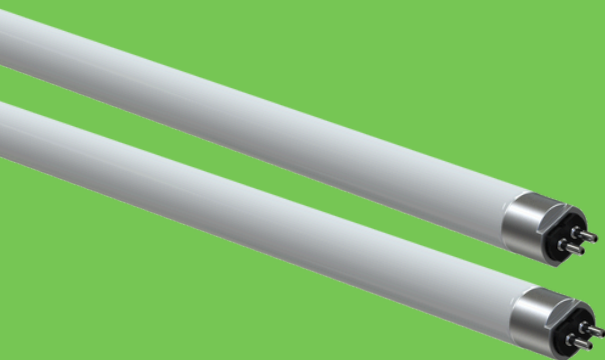


BALLAST COMPATIBLE TLED LAMP

OEO T5HO LED Tube

4FT | 25 Watts | 3,500 Lumens

OEO's T5 LED tubes offer an energy-efficient, long-lasting alternative to traditional fluorescent lighting. Designed to fit standard fixtures, these **ballast compatible** tubes provide consistent brightness with significantly reduced power consumption. Ideal for both commercial and industrial use, our T5 LED tubes have a longer lifespan, reducing maintenance and replacement costs. They are flicker-free with reliable performance. These T5s LED tubes are a great retrofit solution and offer a quick and easy way to upgrade your fixtures to energy saving LED.

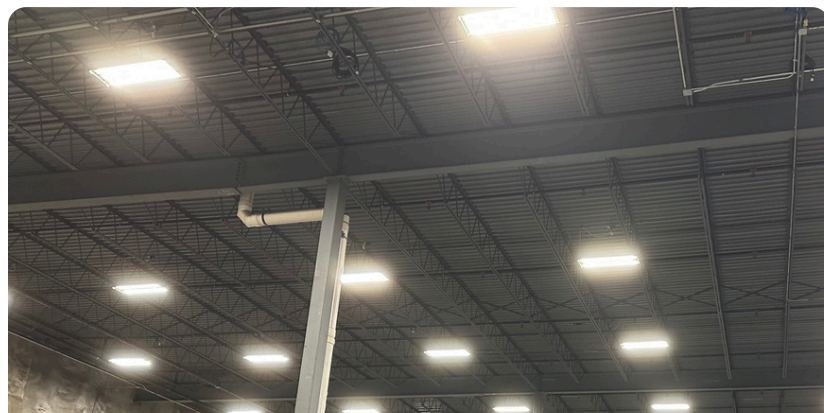

FEATURES

- Simple plug-n-play solution, no fixture rewiring required
- LED direct replacement for conventional fluorescent lamps (Type A, ballast compatible)
- High output replacement for 54 watt F54T5/HO fluorescent T5
- Save up to 54% in energy consumption compared to high output fluorescent T5 tubes
- Long life: rated for over 50,000 hours
- LED tubes last 3 to 5 times longer than fluorescents
- Suitable for dry and damp locations
- Internal coated glass tube
- DLC 5.1, rebate eligible

APPLICATIONS

- Warehouse & Industrial
- Factory & Manufacturing
- Office
- Schools & Universities
- Retail
- Hospital
- Hospitality

CERTIFICATIONS



RoHS

SPECIFICATIONS

- **TYPE:** Ballast Compatible, Type A
- **POWER:** Existing electronic ballast
- **CCT:** 3000K, 3500K, 4000K, 5000K, 6500K options
- **WATTAGE:** 25W
- **LUMENS:** 3,500LM
- **BEAM ANGLE:** 180°
- **BASE:** G5 | miniature bi-pin (5mm)
- **EFFICACY:** 140 lumens per watt
- **CRI:** 82
- **OPERATING TEMP:** -4° to 113°F
- **WARRANTY:** 5 years / 50,000 hours

NOTE:

These Type A tubes are compatible with mainstream market T5-HO ballasts. **Do not use in fixtures where the existing ballast has been bypassed.** Failure to adhere to instructions could void warranty. Please check ballast compatibility list prior to ordering.


BALLAST COMPATIBLE TLED LAMP
OEO T5 High Output LED – 4FT | 25W | 3,500LM

PRODUCT DETAILS


Model	Length	Watts	Lumens	LPW	CCT
OEO-LED-T5HO-4F-25W-3500LM-30K-BC	4FT	25W	3,500LM	140	3000K
OEO-LED-T5HO-4F-25W-3500LM-35K-BC	4FT	25W	3,500LM	140	3500K
OEO-LED-T5HO-4F-25W-3500LM-40K-BC	4FT	25W	3,500LM	140	4000K
OEO-LED-T5HO-4F-25W-3500LM-50K-BC	4FT	25W	3,500LM	140	5000K
OEO-LED-T5HO-4F-25W-3500LM-65K-BC	4FT	25W	3,500LM	140	6500K



DIMENSIONS

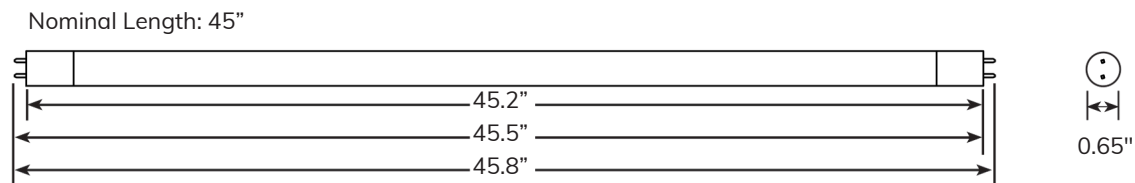

WIRING DIAGRAM

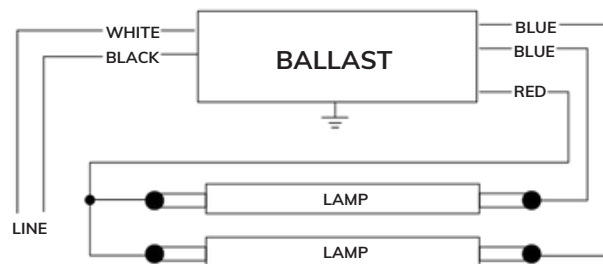

OPERATING NOTES

- Use as direct replacements for fluorescent 4 foot **T5HO lamps with electronic ballasts only**
- Consult with ballast compatibility list. Compatibility subject to change as additional ballasts are tested.
- Suitable for use in dry and damp environments
- Not for use with magnetic ballasts
- Not for use in enclosed fixtures

