

FEATURES

- Replacement for conventional U-Bend 32W fluorescent lamps
- Hybrid Lamp (Type A/B) - operates **with or without a ballast**. Functions with mainstream instant start electronic ballasts (plug and play) AND on direct line voltage 120-277V
- CCT Selectable - 3000K, 3500K, 4000K, 5000K, 6500K
- Wattage & Lumen Adjustable - 11.5W, 13W, 15W; 1,700 to 2,200 Lumens
- Full glass housing - no aging, no yellowing, no bending
- Environmentally friendly, no mercury
- Save up to 63% in energy compared to 32W fluorescent tubes
- Long life: rated for over 50,000 hours
- LED tubes last 3 to 5 times longer than fluorescents
- Suitable for dry and damp locations
- DLC 5.1, rebate eligible

APPLICATIONS

- Office
- Classroom
- Schools & Universities
- Hospital
- Retail
- Hospitality

CERTIFICATIONS

**RoHS**

HYBRID U-BEND LAMP

OEO T8 LED U-Bend

6" Leg Spacing | CCT & Wattage Selectable

OEO's color and wattage selectable hybrid T8 LED U-Bends provide ultimate flexibility. Engineered to work with existing fluorescent ballasts (plug and play) AND on direct line voltage 120-277V, this versatile product has 5 field-selectable CCT options and adjustable lumen output. Our T8 LEDs offer an energy-efficient, long-lasting alternative to traditional fluorescent lighting. Designed to fit standard fixtures, these U-Bends provide consistent brightness with significantly reduced power consumption, ideal for both commercial and industrial use. With a long LED lifespan rated at 50,000 hours, enjoy reduced maintenance and replacement costs.



SPECIFICATIONS

- **TYPE:** Hybrid Lamp (Type A/B)
- **POWER:** Ballast Operated or Direct Wire, 120-277V
- **CCT:** Tunable | 3000K, 3500K, 4000K, 5000K, 6500K
- **WATTAGE:** Selectable | 11.5W, 13W, 15W
- **LUMENS:** Adjustable | 1,700 to 2,200LM
- **BEAM ANGLE:** 210° Distribution
- **BASE:** 2G13 | Medium Bi-Pin
- **CRI:** 82
- **EFFICACY:** 140 to 156 Lumens Per Watt
- **LEG SPACING:** 6 Inches
- **OPERATING TEMP:** -4° to 113°F
- **WARRANTY:** 5 years / 50,000 hours

NOTE:


These Hybrid (Type A/B) tubes operate with mainstream instant start electronic ballasts AND on direct line voltage 120-277V

HYBRID TLED OEO T8 U-Bend – CCT & Wattage Selectable | 6" Leg Spacing

PRODUCT DETAILS

Model	Length	Watts	Lumens	CCT	LPW
OEO-LED-T8-UB6-SELECT-HY	2FT	Selectable 11.5W, 13W, 15W	Adjustable 1,700LM to 2,200LM	Tunable 3000K, 3500K, 4000K, 5000K, 6500K	140 to 156

DIMENSIONS

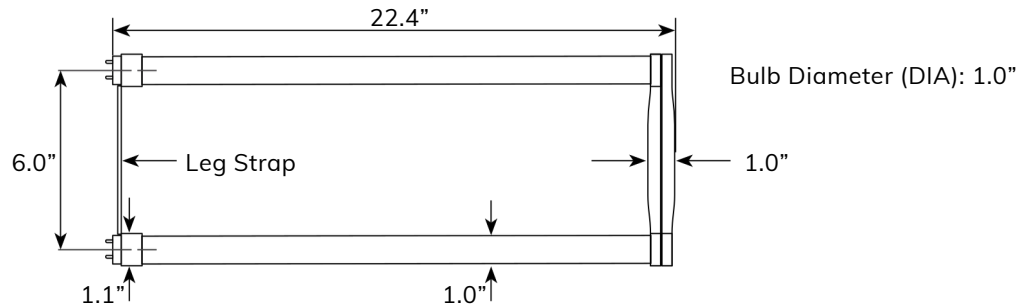

WIRING DIAGRAM

