




## HIGH BAY / LOW BAY FIXTURE

# OEO Linear Pro

The OEO Linear PRO is heavy duty and long lasting IP66 for wet and dirty environments. High brightness and selective beam-spread for your aisle layout. Get great energy savings and low maintenance over the long LED life ensuring consistent performance and fast ROI payback.

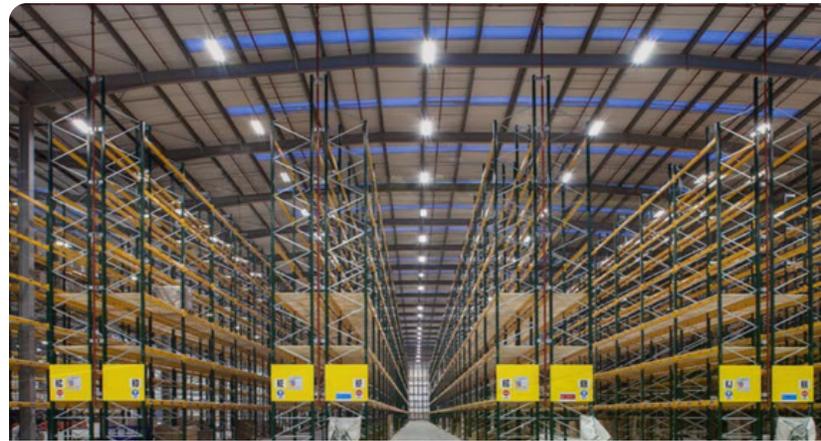

### FEATURES

- 100,000 hour life L70
- Energy savings of 70%+
- IP66 rating: heavy duty fixture
- High brightness; 145 LPW
- Special optical design for precise aisle and rack lighting
- 5 year warranty
- Easy installation and reduced maintenance costs
- Rebate Eligible
- Extremely low glare

### APPLICATION

- Aisle and Bay Lighting
- Warehouse and Manufacturing
- Facilities Big Box Retailers
- Cold Storage Facilities

### CERTIFICATIONS



### SPECIFICATIONS

- **POWERED BY:** 100-277v (480v optional)
- **CCT:** 5,000K
- **CRI:** 70+
- **OPERATING TEMP:** -22°F to 122°F
- **BEAM ANGLE:** 60° x 100° (30° x 100°, 30°, 90°, 110°, 150° optional)
- **HUMIDITY:** 15-95% Relative Humidity
- **MOUNTING OPTIONS:** Chain or Surface Mount (3.2 ft cord standard)
- **DIMMING:** Optional

# HIGH BAY / LOW BAY FIXTURE OEO Linear Pro



## PRODUCT SPECIFICATIONS

MODEL	REPLACES	LUMENS	WEIGHT	DIMENSIONS
 Linear PRO 50W	175-250W HID	7,000 LM	4.4 lbs	13" x 4.1" x 3.8"
 Linear PRO 100W	250-400W HID	14,000 LM	7.1 lbs	24.5" x 4.1" x 3.8"
 Linear PRO 150W	400W HID	21,000 LM	10.4 lbs	36.1" x 4.1" x 3.8"
 Linear PRO 200W	750W HID	28,000 LM	13.4 lbs	47.7" x 4.1" x 3.8"

## ORDERING

FIXTURE TYPE	WATTAGE	VOLTAGE	COLOR TEMP	DIMMABILITY	OPTICS	MOUNTING
OEO LIN PRO	50W 100W 150W 200W	01 = 100-277V 02 = 347-480V	01 = 5,000K 02 = 3,000K 03 = 4,000K	01 = Nondimmable 02 = Microwave sensor dimmer 03 = Infrared sensor and dimmer 04 = Photocell	01 = 60° x 100° 02 = 30° x 100° 03 = 30° 04 = 90° 05 = 110° 06 = 150°	01 = Chain 02 = Surface