



## BALLAST BYPASS TLED LAMP

# T8 LED Tube 2FT | 3FT

OEO offers multiple varieties of LEDs to replace your fluorescent tubes. Our LED tubes are an affordable, reliable, and smart alternative to inefficient T5, T8, and T12 fluorescents. These LED tubes are a great retrofit solution and offer a quick and easy way to upgrade your fixtures to energy savings LED.

### FEATURES

- Save up to 68% energy compared to fluorescent tubes.
- Easily upgrade your existing fixtures to LED
- Long life: 60,000 hours, L80 rating
- LEDs last 2.5x longer than fluorescents
- CRI > 80
- 5 year warranty
- Suitable for dry and damp environments
- NSF listed for food zone (non-contact), splash zone, and non-food zone
- DLC 5.1, rebate eligible

### APPLICATIONS

- Office
- Classroom
- Schools & Universities
- Retail
- Hospital
- Hospitality
- Warehouse

### CERTIFICATIONS



RoHS



### SPECIFICATIONS

- **TYPE:** Ballast bypass, type B
- **POWER:** 110-277v direct line voltage
- **INPUT:** Double ended
- **BEAM ANGLE:** 113° distribution
- **DRIVER:** Integral driver
- **BASE:** G13 medium bi-pin
- **EFFICACY:** 125+ lumens per watt
- **OPERATING TEMP:** -4° to 113°F
- **WARRANTY:** 5 years / 50,000 hours
- **BRAND:** Universal Douglas

### NOTE:

*These type B tubes only operate on direct line voltage 110-277v and require existing fluorescent ballasts to be bypassed before installation.*

# BALLAST BYPASS TLED T8 LED Tube – 2 FT | 3FT


## PRODUCT DETAILS

Model	Nominal Length	Watts	Lumens	LPW	CCT
T8LACD2F9/840B	24"	9W	1,050 LM	117	4000K
T8LACD3F12/840B	36"	12W	1,450 LM	120	4000K
T8LACD3F12/850B	36"	12W	1,450 LM	120	5000K




## DIMENSIONS

Nominal Length: 36"

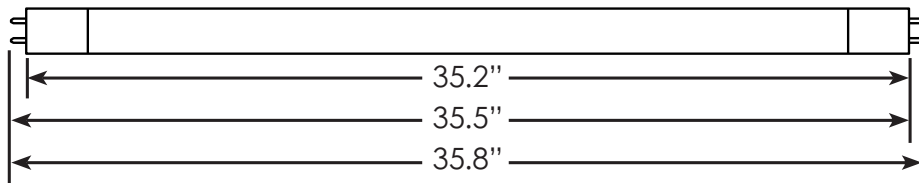

Nominal Length: 24"

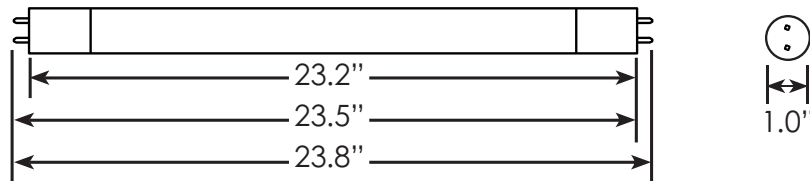

## WIRING DIAGRAM

