



BALLAST BYPASS TLED LAMP

T8 LED Tube 4 Foot

OEO offers multiple varieties of LEDs to replace your fluorescent tubes. Our LED tubes are an affordable, reliable, and smart alternative to inefficient T5, T8, and T12 fluorescents. These LED tubes are a great retrofit solution and offer a quick and easy way to upgrade your fixtures to energy savings LED.



FEATURES

- Save up to 68% energy compared to fluorescent tubes.
- Easily upgrade your existing fixtures to LED
- Long life: 60,000 hours, L80 rating
- LEDs last 2.5x longer than fluorescents
- CRI > 80
- 5 year warranty
- Suitable for dry and damp environments
- NSF listed for food zone (non-contact), splash zone, and non-food zone
- DLC 5.1, rebate eligible

APPLICATIONS

- Office
- Classroom
- Schools & Universities
- Retail
- Hospital
- Hospitality
- Warehouse

CERTIFICATIONS



RoHS



SPECIFICATIONS

- **TYPE:** Ballast bypass, type B
- **POWER:** 110-277v direct line voltage
- **INPUT:** Double ended
- **BEAM ANGLE:** 113° distribution
- **DRIVER:** Integral driver
- **BASE:** G13 medium bi-pin
- **EFFICACY:** 125+ lumens per watt
- **OPERATING TEMP:** -4° to 113°F
- **WARRANTY:** 5 years / 50,000 hours
- **MANUFACTURER:** Universal Douglas

NOTE:

These type B tubes only operate on direct line voltage 110-277v and require existing fluorescent ballasts to be bypassed before installation.

BALLAST BYPASS TLED T8 LED Tube – 4 Foot


PRODUCT DETAILS

Model	Nominal Length	Watts	Lumens	LPW	CCT
T8LACD4F10/840B	48"	10.5w	1,650 LM	157	4000K
T8LACD4F10/850B	48"	10.5w	1,650 LM	157	5000K
T8LACD4F12/840B	48"	12w	1,800 LM	150	4000K
TALACD4F14/835B	48"	14w	1,800 LM	129	3500K
T8LACD4F17/840B	48"	17w	2,200 LM	129	4000K



DIMENSIONS

Nominal Length: 48"

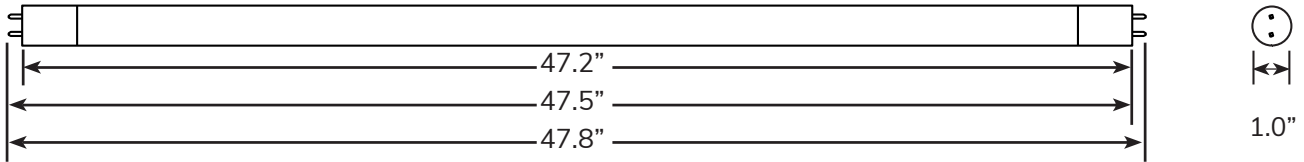

WIRING DIAGRAM

