



LED VAPOR TIGHT FIXTURE

The VTL Series vapor tight luminaire combines a slim, modern profile with rugged protection against moisture, steam, dust, and other contaminants — built to perform in the harshest indoor and outdoor environments. Available in 4FT and 8FT lengths with selectable wattage and color temperature, the fixture features a durable, plastic housing with high-impact frosted polycarbonate lens and durable lens clips for quick, easy installation and disassembly. Ideal for any application where exposure to the elements is a concern.

FEATURES

- Vapor tight luminaire with a closed, sealed housing that protects against moisture and other environmental contaminants
- Durable plastic housing with high-impact frosted polycarbonate lens
- Easy clamp lens cover design for convenient assembly and separation from the body
- Available in 4-foot and 8-foot lengths
- Selectable color temperature: 3000K, 4000K, or 5000K (default)
- Adjustable wattage with scalable output from 4,000–7,700 lumens (4FT) and 8,650–10,750 lumens (8FT)
- 0-10V dimmable driver with dim-to-off capability
- Long LED life, rated for 50,000 hours
- 3-foot power cord standard
- Optional emergency backup power supply and microwave sensor

APPLICATION

- Industrial & Manufacturing
- Parking Garages
- Railway
- Tunnels
- Walk In Coolers
- Indoor & Outdoor
- Damp & Wet Locations

CERTIFICATIONS



SPECIFICATIONS


- **POWERED BY:** 120-277V
- **CCT:** Field Selectable - 3000K, 4000K, 5000K
- **WATTAGE:** Selectable
4FT - 30W, 40W, 50W
8FT - 60W, 70W, 80W
- **LUMENS:** Selectable
4FT - 4,000 to 7,700 LM
8FT - 8,650 to 10,750 LM
- **EFFICACY:** Up to 150 lumens per watt
- **CRI:** 80+
- **OPERATING TEMP:** -13°F to 113°F
- **RATINGS:** IP65 wet locations
- **OPTIONS:** Emergency power supply, microwave sensor
- **WARRANTY:** 5 years

LED VAPOR TIGHT (VTL Series)

PERFORMANCE DATA

MODEL	LUMEN LEVEL	INPUT VOLTAGE	NOMINAL CCT	CCT SELECTABLE	LUMENS	WATTS	LPW	CRI
XVTL-4F-50WS	1	AC120-277 / 347V	3000	Yes	4050	30	135	>80
			4000		4750		159	
			5000		4450		149	
	2		3000		5250	40	131	
			4000		6150		154	
			5000		5800		143	
	3		3000		6500	50	130	
			4000		7700		154	
			5000		7200		144	
XVTL-8F-80WS	1	AC120-277V / 347V	3000	Yes	8650	60	144	>80
			4000		8900		149	
			5000		8750		146	
	2		3000		9800	70	140	
			4000		10100		144	
			5000		9900		142	
	3		3000		10400	80	130	
			4000		10750		135	
			5000		10550		132	


POWER SELECTION AND CCT SELECTION CAPABILITY

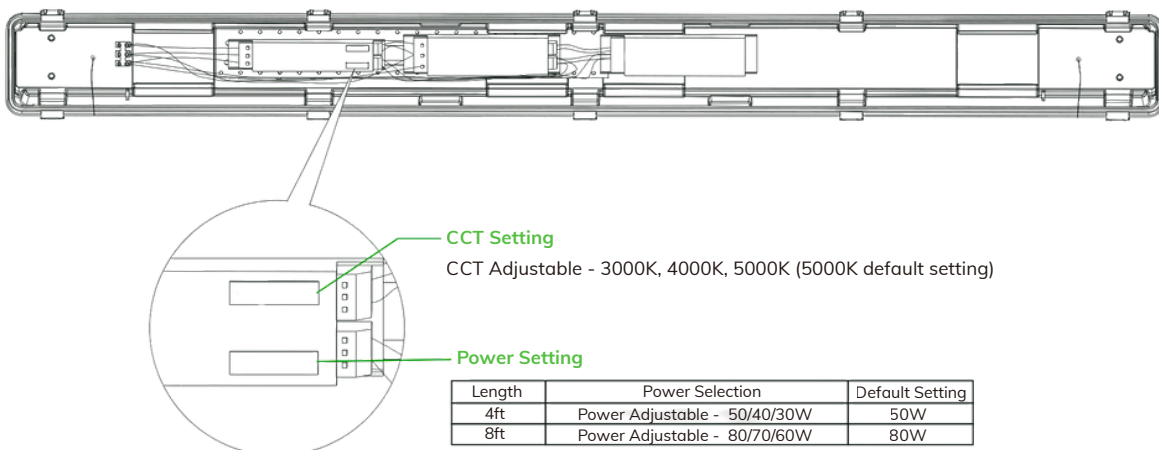


LED VAPOR TIGHT (VTL Series)

DIMENSIONS

4FT - 50W Selectable

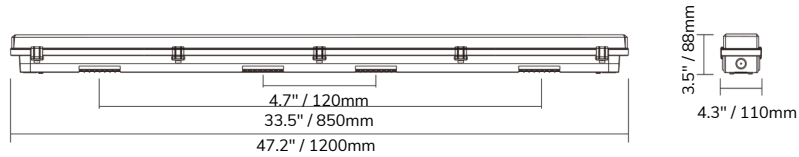

8FT - 80W Selectable

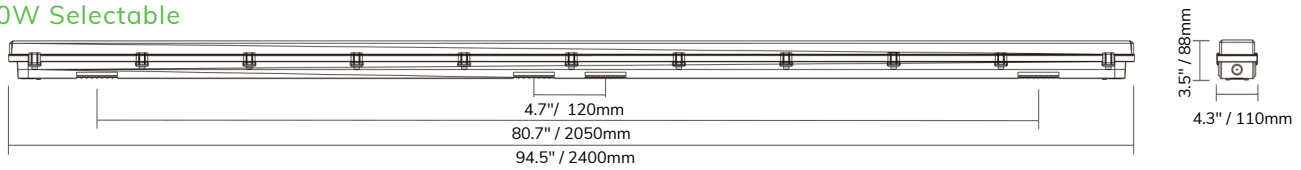

PRODUCT ACCESSORIES

 XEBB14-8WDC Emergency Battery Backup EMB08U1-050 -8W/90min, for VTL, at AC120-277V/347V	 XMSMH-H01 Microwave Sensor VTL
 HD06R Remote Control for Microwave Sensor	 XSPM-A-VTL Suspended mounting kit - 2pcs. for VTL

ORDERING INFO

ex: XVTL-4F-50WS-CSA-UV

MODEL	LENGTH	WATTAGE (SELECTABLE)	CCT (TUNABLE)	POWER	SENSOR (OPTION)	BACKUP BATTERY
XVTL	4F	50WS: 50W, 40W, 30W	CSA: 30K, 40K, 50K	UV: 120- 277V	Blank S: Microwave Sensor	Blank E: Emergency Power Supply
	8F	80WS: 80W, 70W, 60W				

PRODUCT IMAGES

