



**FEATURES**

- Two modes of operation; ballast compatible or ballast bypass
- Maintains bright, more consistent light output; significantly better than HID's
- 50,000 hours rated LED life
- 5 year warranty
- Rebate eligible
- Reduced material and labor costs
- Fast ROI payback
- Instant on/re-strike
- No mercury or hazardous materials
- 30 day money back guarantee

**APPLICATIONS**

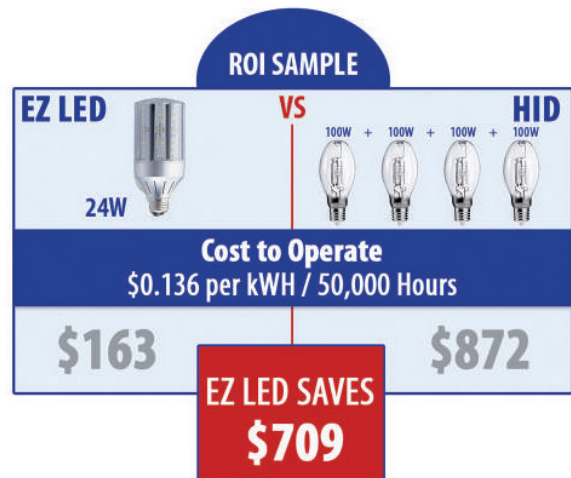
- Outdoor Bollards
- Post Top Fixtures
- Jelly Jar Fixture

**CERTIFICATIONS**







**OVERVIEW**

The OEO EZ LED Versa Hybrid BPT is designed to replace your HID lamps in existing bollards and post tops. Save 65-80% on your electric. Simply plug in/no rewiring for the fastest upgrade. Or you can bypass the ballast, eliminating ballast maintenance forever.



## TECHNICAL SPECIFICATIONS

PRODUCT NAME	WATTAGES	REPLACES	LUMENS	DIMENSIONS	CCT	BASE
 <p><b>EZ LED VERSA BPT-14-4K</b></p>	14W	50W MH/HPS	2,065 Lm	5.4" x 2.6"	4000 K	E26
 <p><b>EZ LED VERSA BPT-18-4K</b></p>	18W	70W MH/HPS	2,985 Lm	6.6" x 2.6"	4000 K	E26
 <p><b>EZ LED VERSA BPT-24-4K</b></p>	24W	100W MH/HPS	3,400 Lm	6.9" x 2.95"	4000 K	E26
 <p><b>EZ LED VERSA BPT-24-5K-E39</b></p>	24W	100W MH/HPS	3,400 Lm	6.9" x 2.95"	5000 K	E39

### YOU GET TWO OPERATING OPTIONS WITH ONE LED

#### CHOOSE BALLAST COMPATIBLE MODE

- Plug-N-Play! Simple HID Direct Replacement
- Requires no re-wiring, no electrician
- Use in MH/HPS Ballasts

#### CHOOSE BALLAST BYPASS MODE

- Line voltage must be between 110V-277V
- Requires simple ballast bypass
- Eliminate ballast maintenance

- **Energy Savings:** 65-80%
- **Powered By:** 110V to 277V or HID Ballast
- **Mounting:** Vertical or Horizontal
- **Beam Angle:** 360°
- **Fixture Material:** Rated for Enclosed Fixture
- **CRI:** 85
- **Environment:** UL classified for damp environment
- **Dimmable:** No
- **Operating Temp:** -40°F to 122°F

## INSTALLATION

- Turn off power when installing lamp
- Do not install in line voltage above 277V
- Installing surge/lightning protection is recommended

