



FEATURES

- Superior optical distribution to get same light level, but even more energy savings
- Reduce energy consumption by 50-75%
- Robust design for harshest conditions
- Passive heat sink for dusty, dirty environments
- Long life LED: 50,000 hrs; 5 year warranty
- Low glare design of optics
- DLC; Rebate eligible
- Direct wired 110-277V

OVERVIEW

OEO Super High Bay is passively cooled for harsh conditions. Our special batwing optics are designed to eliminate glare and deliver previously wasted lumens to the target, resulting in 1.6x higher illumination in center and 2x higher at the edges; get better light level at your work area.

APPLICATIONS

- Warehouse and manufacturing
- Machine and welding shops
- Paper and packaging converters

CERTIFICATIONS



RoHS



BEFORE



AFTER



PRODUCT SPECIFICATIONS

MODEL	WATTAGE	LUMENS	LUMENS PER WATT	REPLACES
OEO Super HB-15Klm	105W	15,000lm	143	250-400W HID
OEO Super HB-20Klm	150W	20,000lm	130	400W HID

- **BEAM ANGLE:** 100° Distribution
- **OPERATING TEMP:** -40°F to 122°F (105W up to 149°F)
- **CCT:** 5000K Standard, 4000K Optional
- **START UP:** Instant On/Off, Instant Re-strike
- **COMPATIBLE:** Dry and Damp Locations

ADDITIONAL OPTIONS

- Optional dimming
- Optional wireless controls
- Optional upright accessory
- Optional occupancy sensors

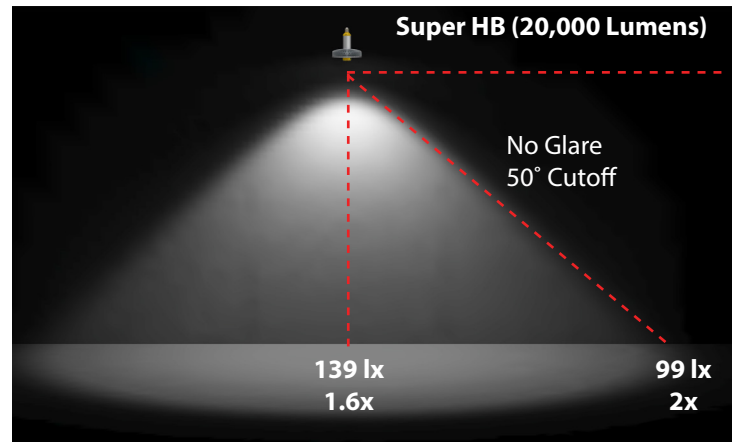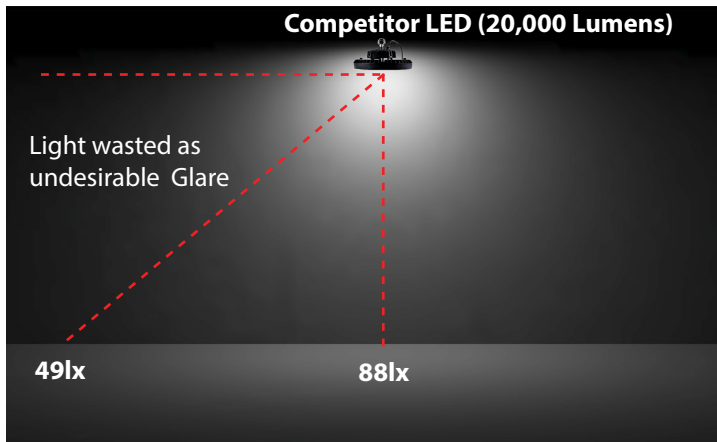

DIMENSIONS

