

Save 70-80% with the OEO DIAMOND II LED wall pack, a long-lasting solution that withstands extreme and demanding environmental conditions.



FEATURES

- High brightness
- Sturdy aluminum alloy wall pack
- Stands up to extreme exterior environments
- 50,000 hours; L70
- 5 year warranty
- IP65 rating
- Maintains consistent performance
- Easy installation and reduced maintenance
- Rebate eligible, DLC
- Energy savings of 70-80%

APPLICATIONS

- Exterior building perimeters
- Parking garages and stairwells
- Security lighting
- Doorway and pathway

OVERVIEW

OEO's Diamond II Wall Pack is a heavy duty, durable fixture, IP65 rating for wet and dirty outdoor environments. Improve the safety and security of your building, entry doors, dock areas and perimeter walkways.



PRODUCT SPECIFICATIONS


Model	Replaces	Lumen Output	Dimensions	Weight
OEO Diamond II-60	150-250W HID	8,700	12" x 8" X 8"	6 lbs
OEO Diamond II-100	250-400W HID	14,500	12" x 8" X 8"	6 lbs
OEO Diamond II-120	400W HID	17,500	12" x 8" X 8"	6 lbs

- Input voltage 100-277V
- 4000K, 5000K; 75+ CRI
- Bronze finish
- -40° F to 122° F operating temperature
- 3 mounting options: Surface Mount, Junction Box Plate, or Slip Fitter

CERTIFICATIONS



OPTICS

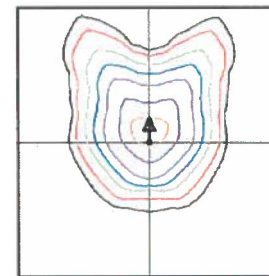


TYPE IV

Type IV distribution maximizes a throw of light in a long, narrow pattern. Commonly used around building facades and parking lot perimeters.

NOTES

- Photocell option available
- Typical mounting height is 8-25 ft
- Typical spacing is 2 times the mounting height

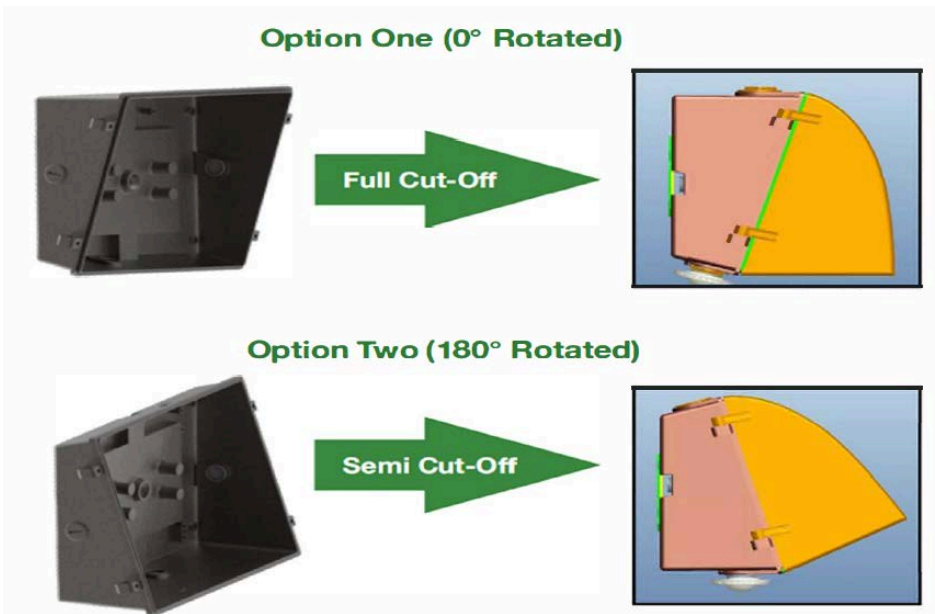

ORDERING

ex. OEO DIAMOND II-100W-01-01-01

MODEL	POWER	INPUT VOLTAGE	COLOR TEMP	PHOTOCELL OPTION
OEO DIAMOND II	60W 100W 120W	01 = 100-277V AC	01 = 4,000K 02 = 5,000K	01 = Photocell