



FEATURES

- System light efficacy 145-150 LPW
- Optional plug-and-play motion sensor
- Customize your settings to auto-dim when nobody is in area
- Rugged one-piece die cast housing
- IP66 for wet and dirty areas
- 40% lighter in weight compared to regular LED high bay
- Much stronger and more durable than steel; suitable for all tough environments
- Rebate eligible
- 5 year warranty

APPLICATIONS

- Warehouse/Manufacturing Facilities
- Convention Centers/Sports Arenas
- Big Box Retailers
- Cold Storage Facilities
- Gymnasiums

CERTIFICATIONS



OVERVIEW

The OEO Aurora is high brightness, long lasting and very lightweight for simple installation. The optional plug-in motion sensor is simple and can allow an additional 50% energy savings.



BEFORE




AFTER

PRODUCT SPECIFICATIONS


Part #	Wattage	Replaces	Total Lumen	Weight	Dimensions
OEO-AUR-HB-100	100W	250W HID	15,000lm	7.5lbs	12.2×12.2×6.7in
OEO-AUR-HB-150	150W	400W HID	22,500lm	7.5lbs	12.2×12.2×6.7in
OEO-AUR-HB-200	200W	750W HID	30,000lm	7.5lbs	12.2×12.2×6.7in
OEO-AUR-HB-240	240W	750W HID	34,800lm	7.5lbs	12.2×12.2×6.7in
OEO-AUR-HB-300	300W	1000W HID	45,000lm	13.2lbs	15×15×7.2in

- **COLOR TEMP:** 5000K (Standard), 4000K Optional
- **CRI:** 80+ (300W 70+)
- **LIFESPAN:** L70>120,000 hours
- **INPUT VOLTAGE:** 100-277 VAC (277-480 VAC optional)
- **DIMMING:** Optional
- **IP RATING:** IP66
- **OPERATING TEMP:** -22°F - 122°F
- **HUMIDITY:** 15% to 95% RH
- **MATERIAL:** Aluminum Alloy with Polycarbonate Lens
- **BEAM ANGLE:** 90° standard, 120° optional
- Optional Dome Lens

PLUG-N-PLAY MOTION SENSOR

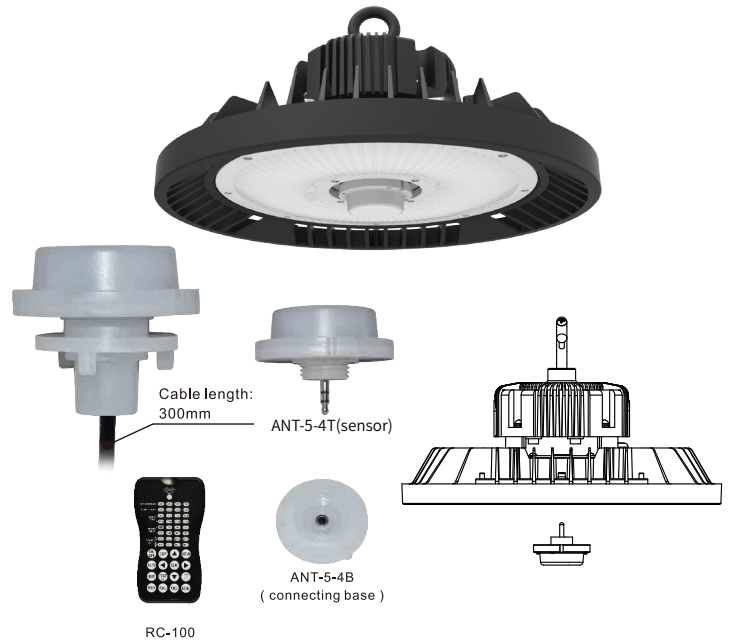

MOUNTING OPTIONS



ORDERING INFORMATION

ex. OEO-AUR-HB-150-01-01-01-02-01

