



FEATURES

- Simply Screw in EZ LED to Existing Open High Bay Fixtures
- Requires No Ballast Bypass, No Rewiring, No Electrician
- Quickest Way to Upgrade to LED Technology
- Reduces Energy Consumption By 50-60%
- Long Life LED 50,000 Hours, L70
- Prevent Dark Ceilings with Optional Uplighting
- Fast ROI Payback
- 5,000K; 83+ CRI
- Reduced HVAC Costs Since LED is 90% Cooler than Metal Halides
- No Mercury or Hazardous Materials

OVERVIEW

OEO EZ LED Ultra Series is designed to directly replace 175W to 400W metal halide lamps. It is compatible with your traditional HID fixtures and emits more light without rewiring the fixture. Simply remove the MH bulb and replace it with the EZ LED for longer life while using a fraction of the power.

APPLICATIONS

- Warehouse
- Big Box Retailers
- Gymnasiums & Sports Arenas
- Auto Dealerships

CERTIFICATIONS



BEFORE




AFTER

PRODUCT SPECIFICATIONS

<p>*Aluminum Dome</p> 	BRIGHT	EZ-LED-SO-D-5K				
	Installed Ballast	400W	350W	320W	250W	175W
	Wattage	170W	150W	130W	105W	75W
	Lumens	18,000 Lm	16,000 Lm	14,500 Lm	12,500 Lm	9,000 Lm
<p>*Aluminum Dome</p> 	BRIGHTER	EZ-LED-HO-D-5K				
	Installed Ballast	400W	350W	320W	250W	175W
	Wattage	200W	180W	165W	130W	95W
	Lumens	21,500 Lm	19,450 Lm	17,900 Lm	14,300 Lm	10,000 Lm
<p>*Glass/Acrylic Dome</p> 	BRIGHTER W/ UPLIGHT	EZ-LED-HO-U-5K				
	Installed Ballast	400W	350W	320W	250W	175W
	Wattage	195W	170W	160W	125W	85W
	Lumens	24,500 Lm	21,500 Lm	21,000 Lm	17,500 Lm	12,000 Lm
<p>*Glass/Acrylic Dome</p> 	BRIGHTEST W/ UPLIGHT	EZ-LED-VHO-U-5K				
	Installed Ballast	400W	350W	320W	250W	175W
	Wattage	205W	180W	170W	130W	90W
	Lumens	29,000 Lm	27,000 Lm	24,000 Lm	21,000 Lm	15,000 Lm

**Lumen Output and Power Consumption +/- 5%, based on actual magnetic ballasts.

DIMENSIONS

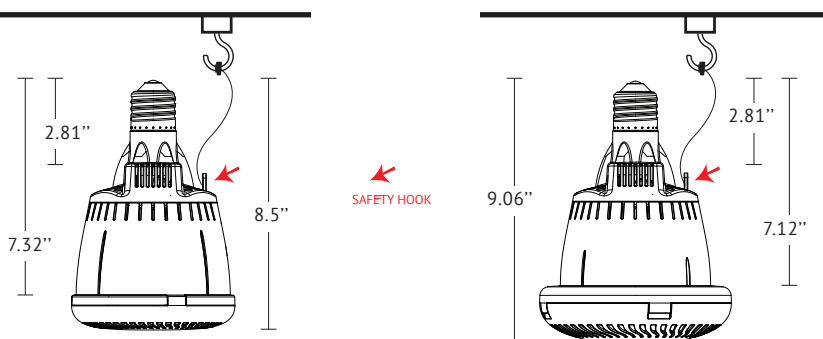

MODELS: EZ-LED-SO-D-5K
EZ-LED-HO-D-5K

WEIGHT: 1.95 LBS

MODELS: EZ-LED-HO-U-5K
EZ-LED-VHO-U-5K

WEIGHT: 2.3 lbs

- **POWERED BY:** Metal Halide Ballast
- **ENERGY SAVINGS:** 50-60%
- **MOUNTING:** Vertical, Open
- **BEAM ANGLE:** 95° Distribution
- **OPERATING TEMP:** -4°F to 131°F
- **START UP:** Instant on/off, Instant Re-strike

NOTES

- Compatible with Occupancy Sensors
- Magnetic Ballasts Only
- Will not function in Bypassed Ballasts, HPS Ballasts, Electronic Ballasts